

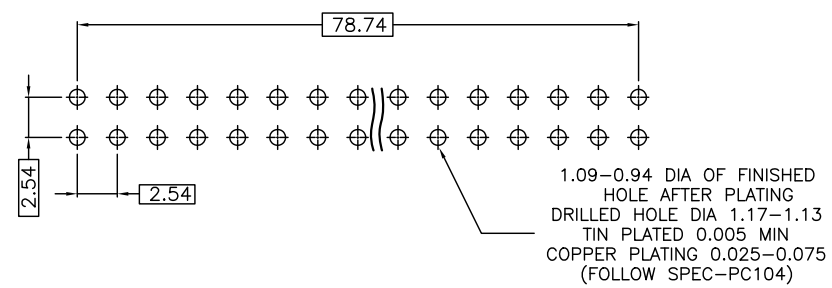
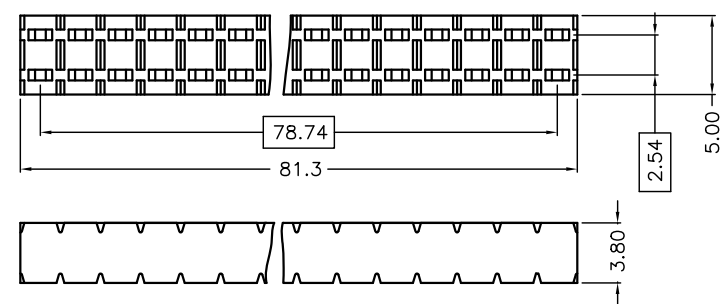
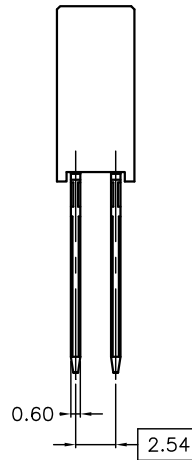
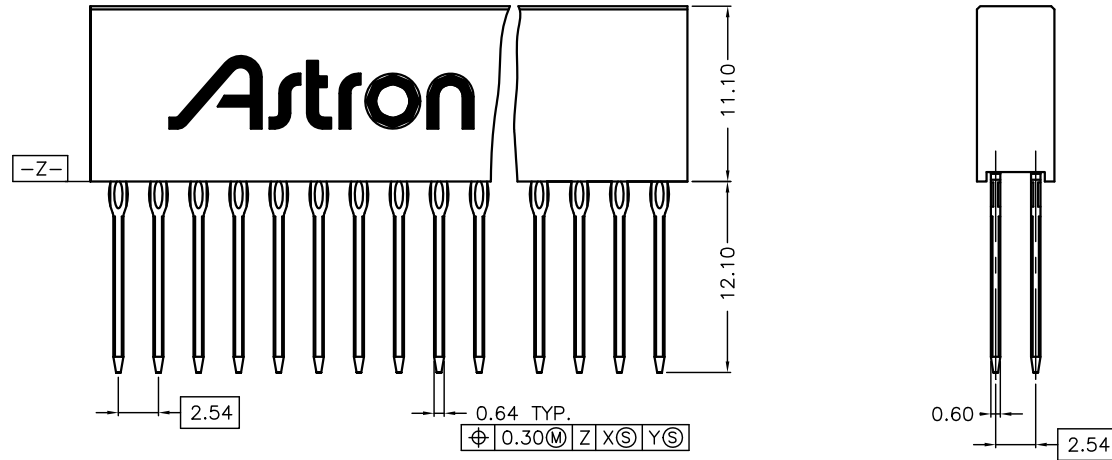


REV.	ECN NO.	DATE
A	RELEASED	Dec 25,2001
B	05'0453	Apr 19,2005
C	07'1135	Nov 13,2007
D	10'0644	Jul 13,2010

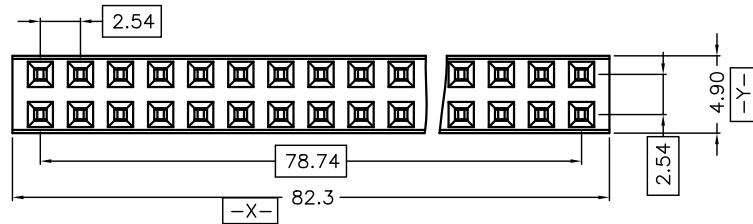

RECOMMENDED P.C.B LAYOUT  
TOLERANCE  $\pm 0.05$   
BOTTOM VIEW

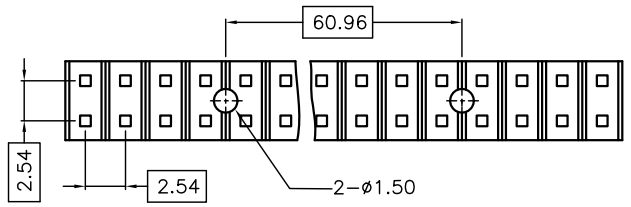

PART NUMBER INFORMATION :

1100064-202-R  
 SERIES CODE ———— ROHS  
 PRESS FIT ———— FOLLOW NUMBER  
 FEMALE ———— CONTACT PLATING:  
 NUMBER OF POSITIONS ———— 10u" GOLD

1. MATERIALS AND FINISH
  - 1.1 HOUSING  
THERMOPLASTIC (UL 94V-0).BLACK.
  - 1.2 CONTACTS:COPPER ALLOY.  
GOLD PLATED OVERALL  
UNDER PLATED NICKEL.
2. SPECIFICATIONS
  - 2.1 CURRENT RATING:1 A MAX.
  - 2.2 INSULATION RESISTANCE:  
5000 MΩ MIN AT 500V DC.
  - 2.3 DIELECTRIC WITHSTANDING VOLTAGE:  
1000V AC R.M.C FOR 1 MINUTE.
  - 2.4 CONTACT RESISTANCE:  
30 mΩ MAX.
  - 2.5 OPERATING TEMPERATURE:  
-55°C ~ +85°C.

TOLERANCE .0= $\pm 0.38$ .00= $\pm 0.25$ .000= $\pm .15$ ANG.= $\pm 3^\circ$		DRAWER <i>Lally</i> CHECK <i>Lally</i> APP'D <i>Tomyang</i>		 ASTRON TECHNOLOGY CORP. NAME $\Delta$ 2.54PH HEADER RECETACLE PRESS FIT BLACK 64PIN SOLDER TAIL LENGTH 12.10mm AT LOGO	
UNITS : mm		PRODUCT SPEC.			
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. D		