



REV.	DESCRIPTION	DATE
A	RELEASE	Oct.10, 2018

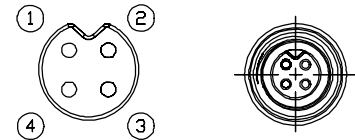

Front View
Pin Assignment

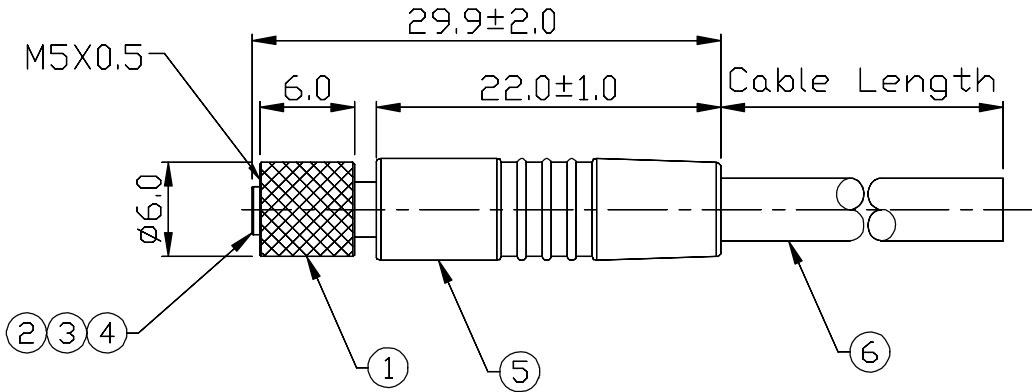


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Durability: 100 Cycles Min.
3. DWV: 900 Vrms.
4. Rated Voltage: 60V AC/DC.
5. Insulation Resistance: 100 MΩ Min.
6. RoHS Compliant.

1	Brown
2	White
3	Blue
4	Black

Wiring Diagram

DAF0000016-R	10000 mm	±500
DAF0090016-R	9000 mm	±450
DAF0080016-R	8000 mm	±400
DAF0070016-R	7000 mm	±350
DAF0060016-R	6000 mm	±300
DAF0050016-R	5000 mm	±250
DAF0040016-R	4000 mm	±200
DAF0030016-R	3000 mm	±150
DAF0020016-R	2000 mm	±100
DAF0010016-R	1000 mm	±50
DAF0009016-R	900 mm	±40
DAF0008016-R	800 mm	±40
DAF0007016-R	700 mm	±40
DAF0006016-R	600 mm	±40
DAF0005016-R	500 mm	±40
DAF0004016-R	400 mm	±40
DAF0003016-R	300 mm	±40
DAF0002016-R	200 mm	±40
Part No.	Cable Length	Tol.

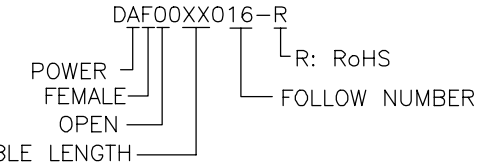

6	Cable	UL2464 26AWG*4C OD=4.0±0.2mm, Color: Black	1
5	Over Mold	PVC Color: Black	1
4	O-Ring	NBR Color: Black	1
3	Contacts	Copper Alloy Finish: Au Plated	4
2	Housing	Thermoplastic Color: Black	1
1	Screw Nut	Copper Alloy Finish: Ni Plated	1
Item	Part Name	Material / Finish	Q'ty

<u>TOLERANCE</u> .0=±0.50 .00=±0.20 .000=±0.05 ANG.=±1°		DRAWER <i>EXR</i>		Astron ASTRON TECHNOLOGY CORP.	
		CHECK <i>JYU</i>			
		APP'D <i>JYU</i>		NAME M5 1A 4P CABLE END FEMALE	
 UNITS : mm		PRODUCT SPEC. —		DRAW NO. DAF00XX016-R	
SCALE NONE	SIZE A5	SHEET 1 OF 1	REV. A		