
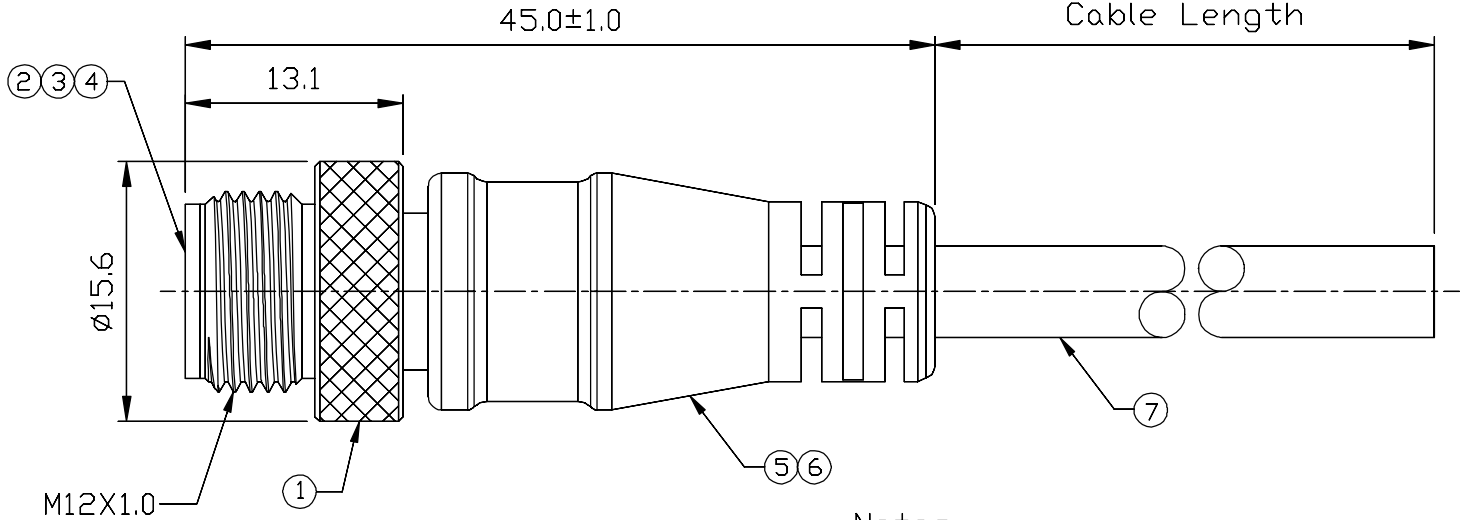


REV.	DESCRIPTION	DATE
A	RELEASE	Oct.10, 2018

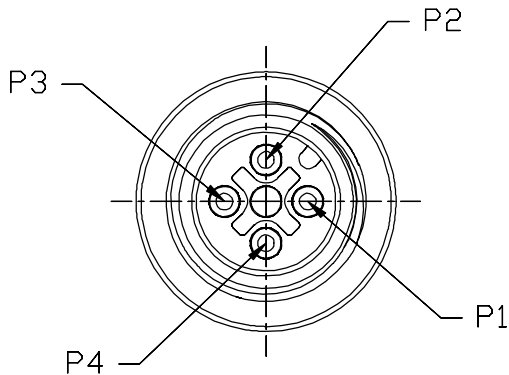


1	Black
2	Brown
3	Bule
4	White

Wiring Diagram

Notes: (Unless Otherwise Specified)

1. Waterproof Rate : IP68.
2. Durability: 100 Cycles Min.
3. DWV: 1400 Vrms
4. Rated Voltage: 250V AC/DC
5. Insulation Resistance: 100 MΩ Min.
6. RoHS Compliance.

Part Number Information:

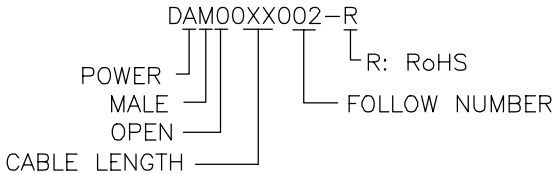


Materials:

7	Cable	UL20549 4C*22AWG+Talcum, PU Color: Black, OD=4.8±0.2mm	1
6	Over Mold	TPU Color: Black	1
5	Inner Mold	Thermal Plastic Color: White Or Black	1
4	Base	Thermal Plastic Color: Black	1
3	Contacts	Copper Alloy Finish: Au Plating	4
2	Housing	Thermal Plastic Color: Black	1
1	Screw Nut	Copper Alloy Finish: Ni Plated	1
Item	Part Name	Material / Finish	Q'ty

DAM0000002-R	10000 mm	±500
DAM0090002-R	9000 mm	±450
DAM0080002-R	8000 mm	±400
DAM0070002-R	7000 mm	±350
DAM0060002-R	6000 mm	±300
DAM0050002-R	5000 mm	±250
DAM0040002-R	4000 mm	±200
DAM0030002-R	3000 mm	±150
DAM0020002-R	2000 mm	±100
DAM0010002-R	1000 mm	±50
DAM0009002-R	900 mm	±40
DAM0005002-R	500 mm	±40
DAM0003002-R	300 mm	±40

Part No.	Cable Length	Tol.
----------	--------------	------

<u>TOLERANCE</u> .0=±0.50 .00=±0.20 .000=±0.05 ANG.=±1°		DRAWER <i>ENR</i>		Astron ASTRON TECHNOLOGY CORP.
		CHECK <i>JYJY</i>		
		APP'D <i>JYJY</i>		
 UNITS : mm		PRODUCT SPEC. —		NAME M12 A-CODING 4A 4P CABLE END MALE
				DRAW NO. DAM00XX002-R
SCALE NONE	SIZE A5	SHEET 1 OF 1	REV. A	