




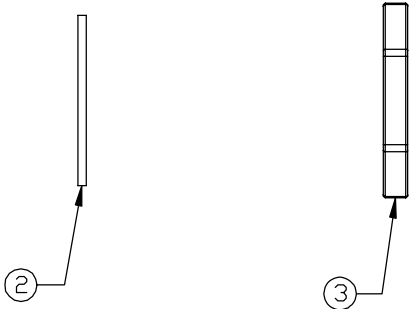


REV.	DESCRIPTION	DATE
A	RELEASE	Oct.15, 2018

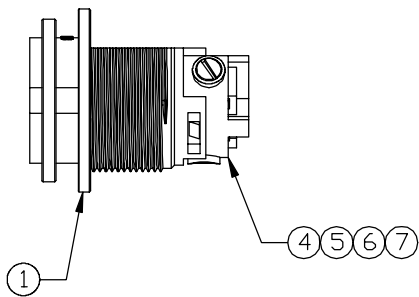

Recommend
Panel Cut-Out

Materials:

7	Machine Screw	S15C Finish: Ni Plated	3
6	Fixed lid Female 3P	Thermoplastic Color: Black	1
5	Terminal	Copper Alloy Finish: Sn Plated	3
4	Contacts	Copper Alloy Finish: Ni Plated	3
3	Hex Nut	Thermoplastic Color: Black	1
2	Gasket	Silicone Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty

Part Number Information:

302F003-N0001D-R
R: RoHS
SERIES CODE
CRIMPING
FEMALE
NUMBER OF PIN
FOLLOW NUMBER
CONTACT PLATING
N: Ni PLATING

Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Hex Nut Torque: 9~10 Kgf-cm.
4. RoHS Compliant.

TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		DRAWER <i>EXER</i> CHECK <i>SYUNY</i> APP'D <i>SYUNY</i>	Astron ASTRON TECHNOLOGY CORP. NAME POWER M35 41A 3P FIELD INSTALLABLE PANEL FEMALE SCREW-IN PUSH LOCK
UNITS : mm		PRODUCT SPEC. —	
SCALE NONE	SIZE A5	SHEET 1 OF 1	REV. A
DRAW NO. R302F003-N0001D-R			