
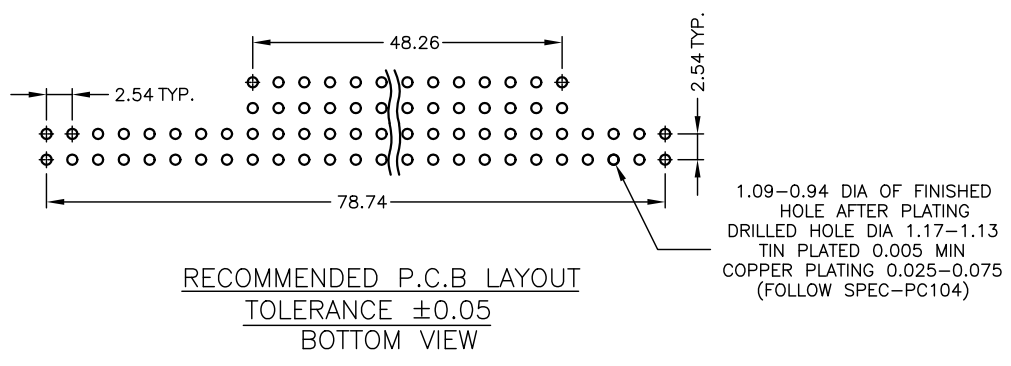
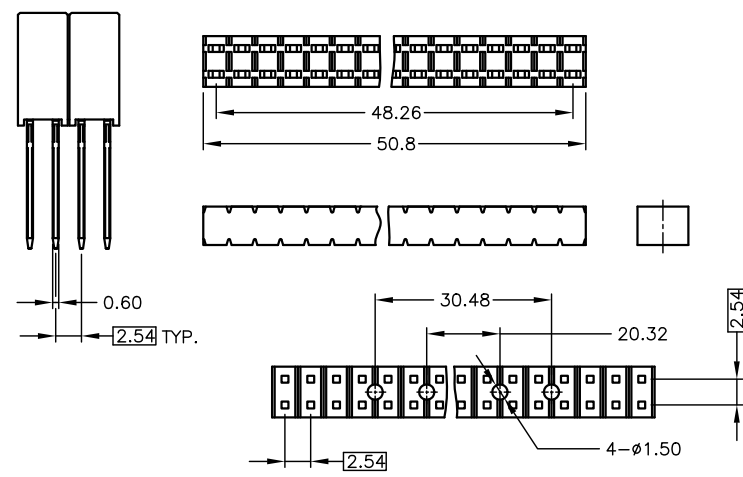
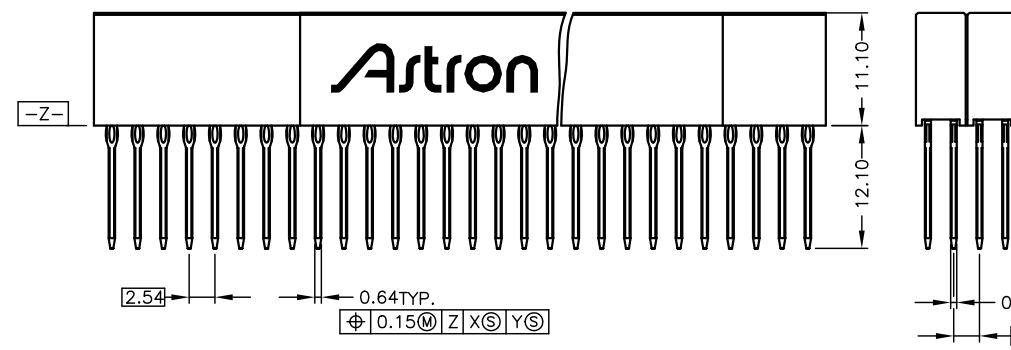
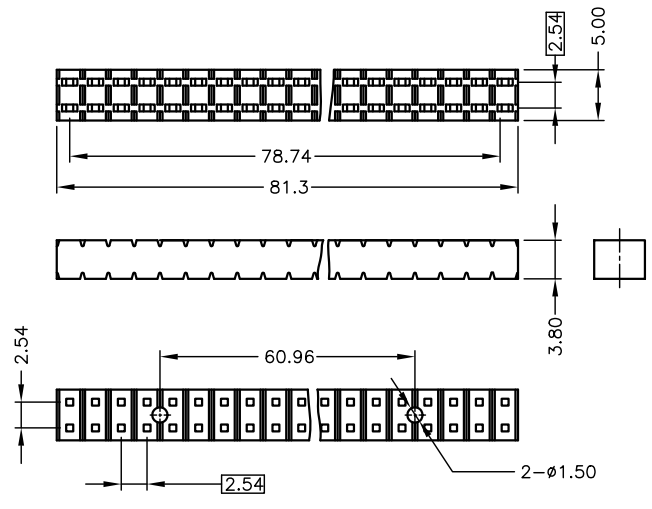


REV.	ECN NO.	DATE
A	RELEASED	Oct 18,2002
B	05'0453	Apr 19,2005
C	10'0644	Jul 13,2010

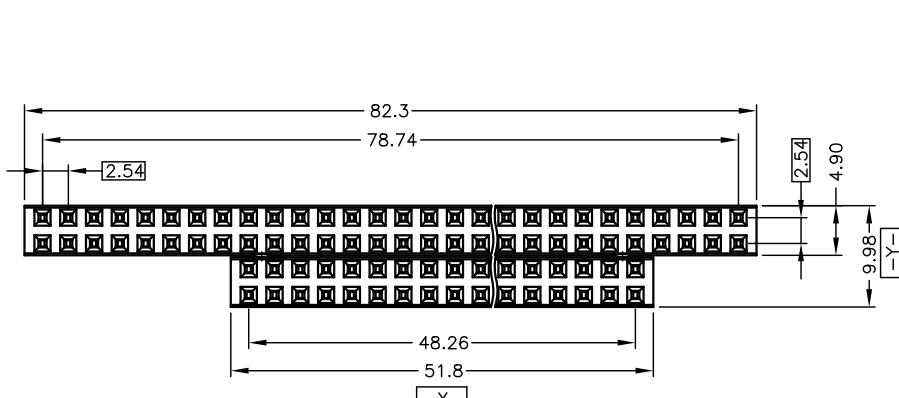

1.09-0.94 DIA OF FINISHED HOLE AFTER PLATING
DRILLED HOLE DIA 1.17-1.13
TIN PLATED 0.005 MIN
COPPER PLATING 0.025-0.075
(FOLLOW SPEC-PC104)

1. MATERIALS
- 1.1 HOUSING THERMOPLASTIC (UL 94V-0).BLACK.
 - 1.2 CONTACTS:COPPER ALLOY. GOLD PLATED OVERALL NICKEL UNDER PLATED OVERALL .
2. SPECIFICATIONS
- 2.1 CURRENT RATING:1 A MAX.
 - 2.2 INSULATION RESISTANCE: 5000 MΩ MIN AT 500V DC.
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC R.M.C FOR 1 MINUTE.
 - 2.4 CONTACT RESISTANCE: 30 mΩ MAX.
 - 2.5 OPERATING TEMPERATURE: -55°C ~ +85°C.

ORDER INFORMATION :

1100104-202-R

SERIES CODE 1100104
PRESS FIT
FEMALE
NUMBER OF POSITIONS 202

RoHS
FOLLOW NUMBER
CONTACT PLATING: GOLD PLATED

TOLERANCE .0±0.38 .00±0.25 .000±.15 ANG.=±3°		DRAWER <i>Sally</i>	 ASTRON TECHNOLOGY CORP.
UNITS : mm		CHECK <i>Sally</i>	
		APP'D <i>Tomyang</i>	NAME 2.54PH HEADER RECETACLE PRESS FIT BLACK 104PIN SOLDER TAIL LENGTH 12.10mm(AT LOGO)
SCALE NONE		PRODUCT SPEC. —	DRAW NO. R1100104-202
SIZE A4	SHEET 1 OF 1	REV. C	