
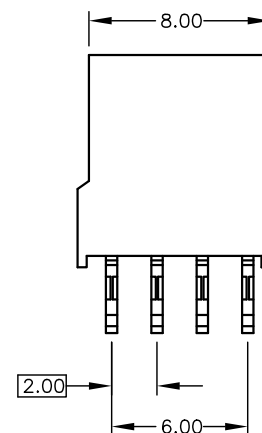
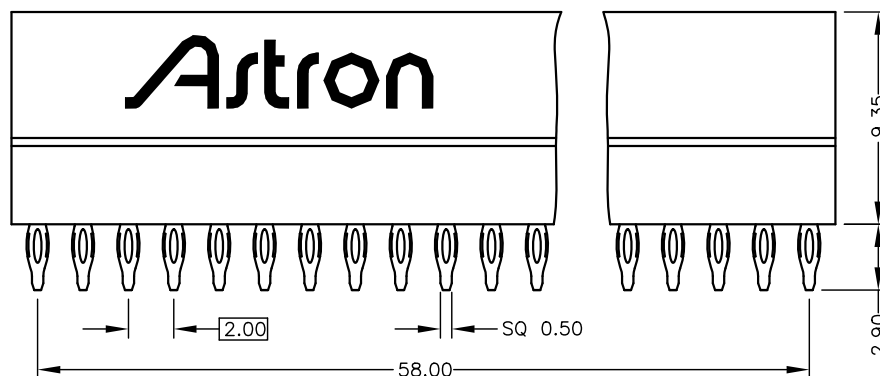


REV.	DESCRIPTION	DATE
A	RELEASE	Jun 04,2003
B	05'0453	Apr 19,2005
C	10'0644	Jul 13,2010

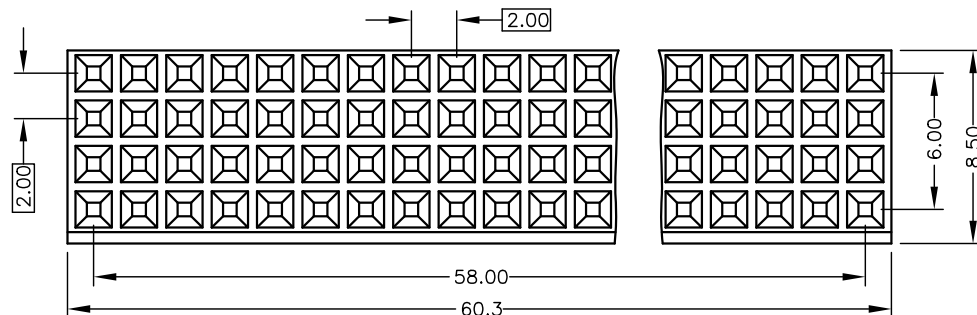



MATERIALS

- HOUSING: THERMOPLASTICS .UL 94V-0, BLACK
- TERMINAL : COPPER ALLOY. (T=0.50mm)
GOLD PLATED ON CONTACTS AREA
UNDER NICKEL PLATED

SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
1000V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE :
5000M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE :
30m OHMS MAX.
- OPERATING TEMPERATURE :
-55°C TO +85°C.

ORDER INFORMATION :

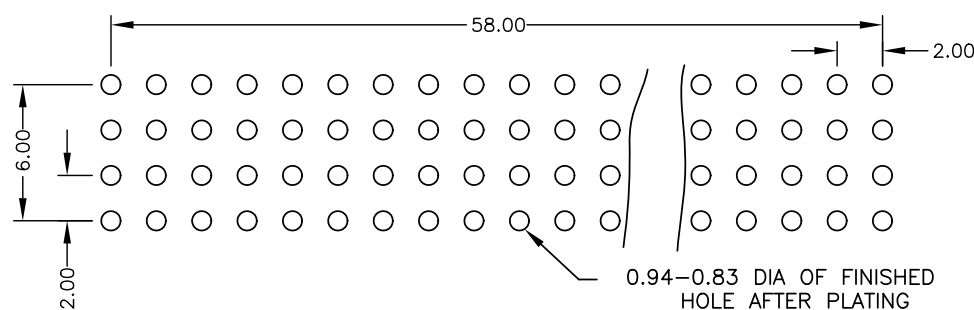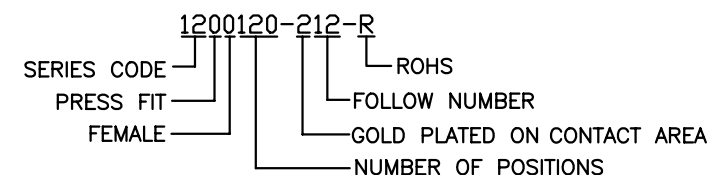

RECOMMENDED P.C.B LAYOUT
TOLERANCE ± 0.05
TOP VIEW

0.94-0.83 DIA OF FINISHED HOLE AFTER PLATING
DRILLED HOLE DIA 1.02-0.98
TIN PLATED 0.005 MIN
COPPER PLATING 0.025-0.075
(FOLLOW SPEC-PC104)

TOLERANCE .0= ± 0.38 .00= ± 0.25 .000= ± 0.15 ANG.= $\pm 3^\circ$		DRAWER <i>Sally</i> CHECK <i>Sally</i> APP'D <i>Jomyang</i> PRODUCT SPEC.	 ASTRON TECHNOLOGY CORP. NAME Δ 2.0PH HEADER RECETACLE PRESS FIT 4R*30P SOLDER TAIL LENGTH 2.9mm AT LOGO
UNITS : mm		DRAW NO. R1200120-212	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. C