

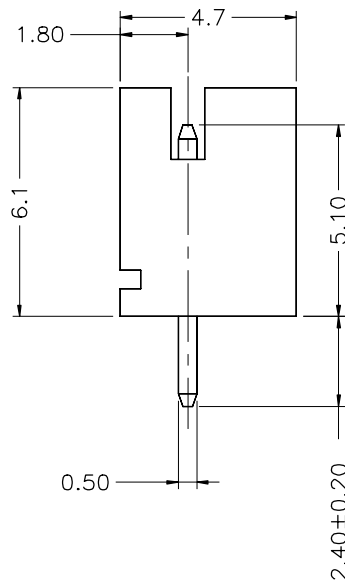
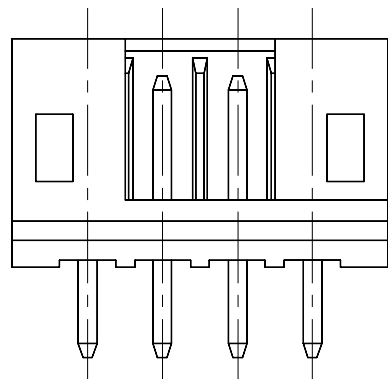


REV.	DESCRIPTION	DATE
A	RELEASE	Jun. 27, 2008
B	09'0604	Jun. 03, 2009
C	N14'10017	Oct. 22, 2014

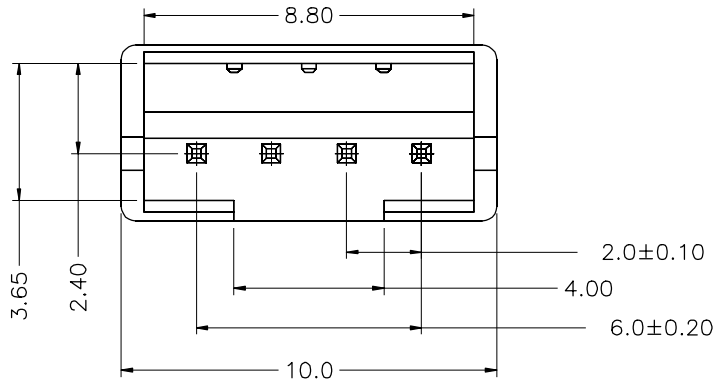

RECOMMEND P.C.B. LAYOUT  
TOLERANCE  $\pm 0.05$   
TOP VIEW


### MATERIALS

- HOUSING : NYLON 66. (UL 94V-0).
- TERMINAL : S.Q. 0.50mm BRASS,TIN PLATING.

### SPECIFICATION

- CURRENT RATING : 2 A MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE
- INSULATION RESISTANCE : 1000M $\Omega$  MIN. AT 500V DC.
- OPERATING TEMPERATURE :  $-25^{\circ}$  TO  $85^{\circ}$ C
- MAX.PROCESSING TEMPERATURE:  $235^{\circ}$ C FOR 5 SECONDS.

### PART NUMBER INFORMATION

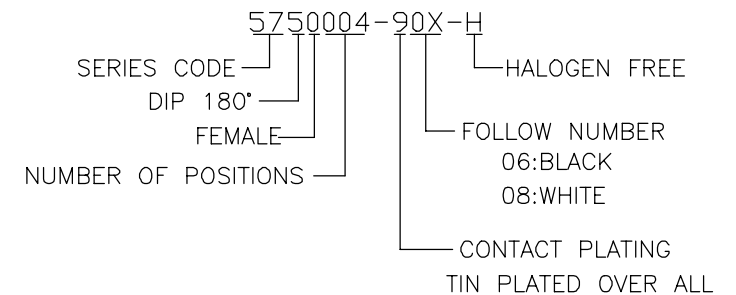

TOLERANCE .0= $\pm 0.25$ .00= $\pm 0.15$ .000= $\pm .XXX$ .0000= $\pm .$ ANG.= $\pm 3^{\circ}$		DRAWER <i>You</i>		 ASTRON TECHNOLOGY CORP. NAME POWER CONNECTOR 2.0mm PITCH, R/A,P.C.B. MOUNT VERTICAL DRAW NO. R5750004-90X-H
 UNITS : mm		CHECK <i>Stony</i>		
		APP'D <i>Rex</i>		
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. C	