

REV.	DESCRIPTION	DATE
A	RELEASE	Mar.25, 2011
B	N16'12003	Dec.09, 2016
C	N18'06008	Jun.16, 2018


MATERIALS:

- 1. HOUSING: PA9T (UL94V-0) BLUE 300C.
- 2. TERMINAL: COPPER ALLOY, PLATING: GOLD PLATED ON CONTACT AREA, TIN PLATED ON SOLDER OVER, NICKEL UNDER PLATED OVER ALL
- 3. SHELL: PLATING: NICKEL PLATED OVER ALL
- 4. BOARD LOCK: COPPER ALLOY, PLATING: MATTE TIN PLATED OVER ALL.
- 5. RIVET: Zn ALLOY. PLATING: NICKEL PLATED OVER ALL.






SPECIFICATION

- 1. CURRENT RATING : 1 A MAX.
- 2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- 3. CONTACT RESISTANCE : 30mΩ MAX.
- 4. INSULATION RESISTANCE : 1000 MΩ MIN. AT 500V DC.
- 5. OPERATING TEMPERATURE : -55°C TO +105°C.
- 6. MAX. PROCESS TEMP.: 230°C FOR 30-60 SECONDS, 260°C FOR 10 SECONDS.

PART NUMBER INFORMATION :

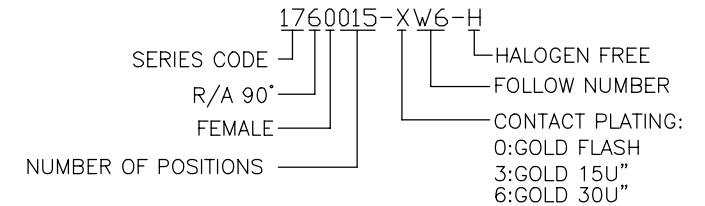


TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		DRAWER		Astron ASTRON TECHNOLOGY CORP.
 UNITS : mm		CHECK		
		APP'D		
SCALE NONE		SIZE A6		NAME HDD-SUB 15PIN SLIM TYPE II (HALOGEN FREE)
SHEET 1 OF 2		REV. C		DRAW NO. R1760015-0W6-H

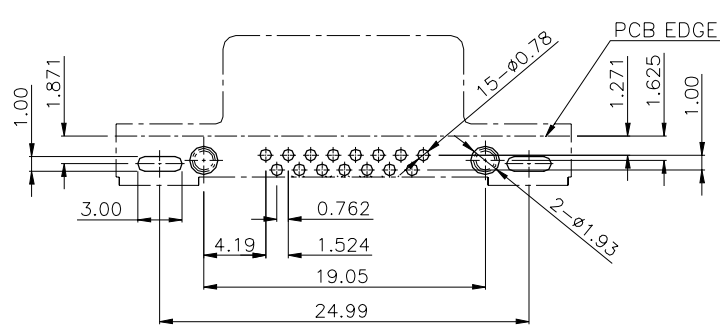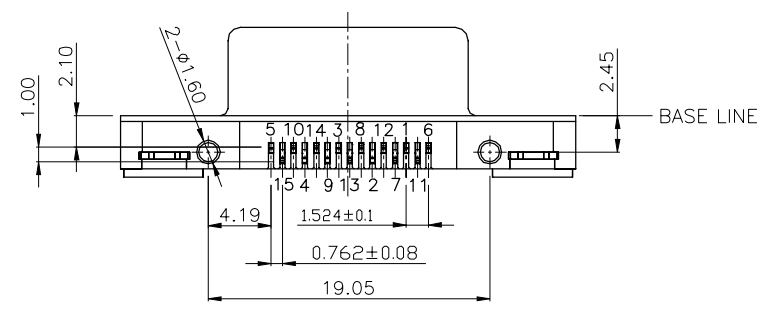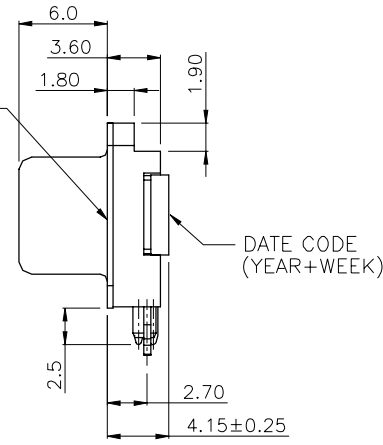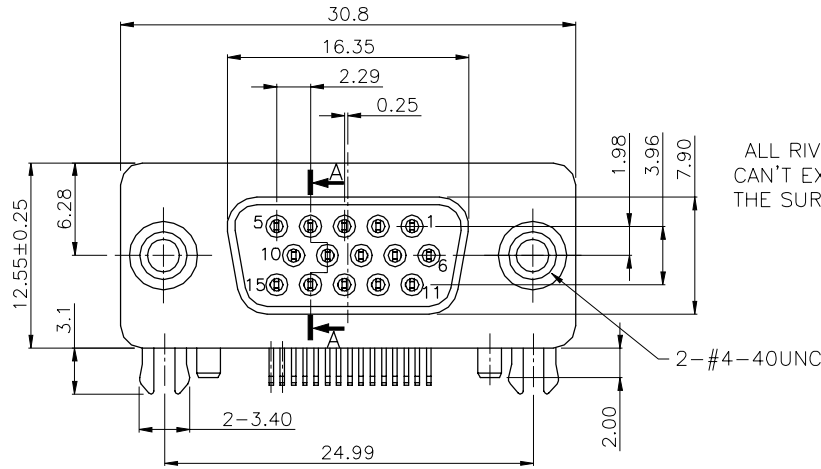

RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05
TOP VIEW

REV.	DESCRIPTION	DATE
A	RELEASE	Mar 25, 2011
B	N16'12003	Dec 09, 2016
C	N18'06008	Jun.16, 2018

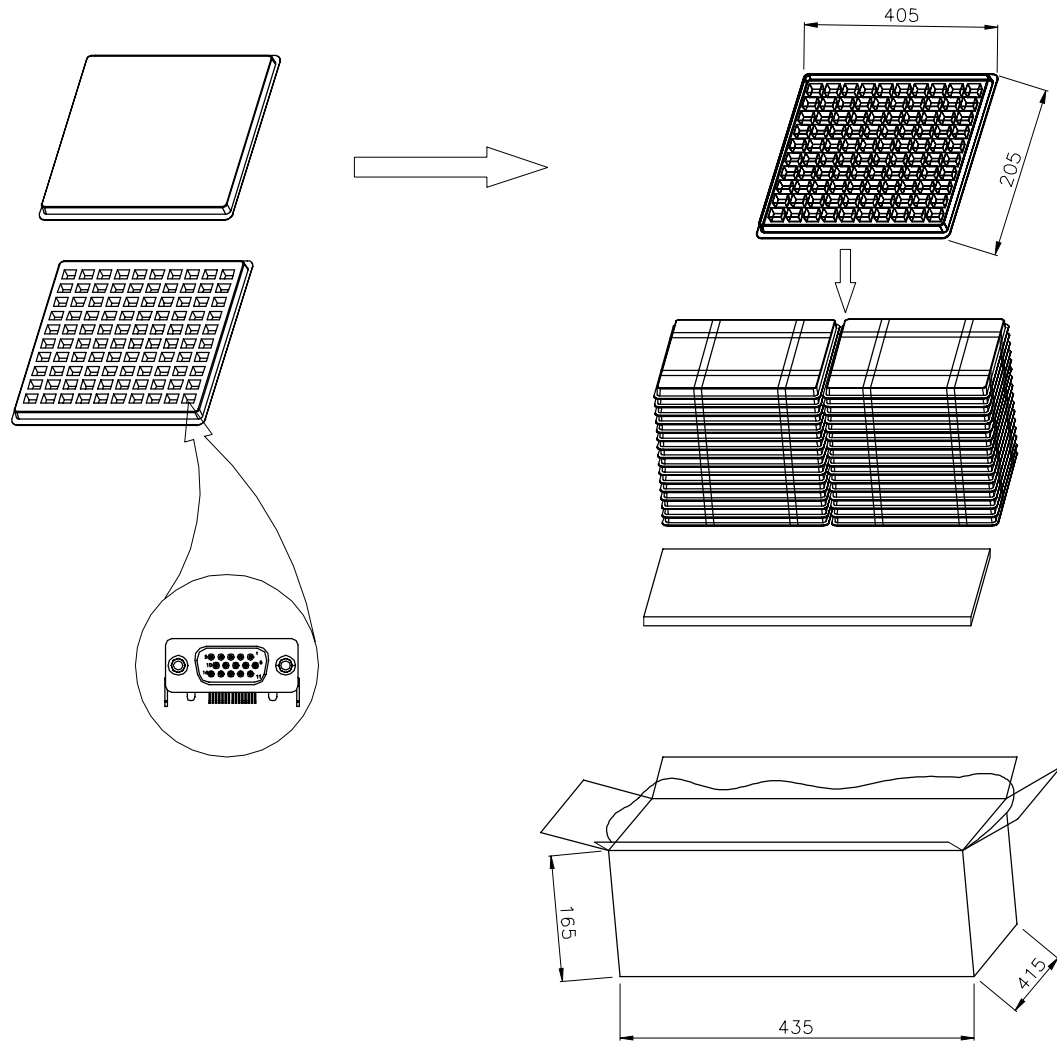

QUANTITY:
 1. 100PCS/TRAY
 2. 20TYAR/CARTON

<u>TOLERANCE</u> .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		DRAWER		 ASTRON TECHNOLOGY CORP.	
 UNITS : mm		CHECK			NAME
SCALE NONE		SIZE A6			HDD-SUB 15PIN SLIM TYPE II (HALOGEN FREE)
SHEET 2 OF 2		REV. C		DRAW NO.	
				R1760015-0W6-H	