

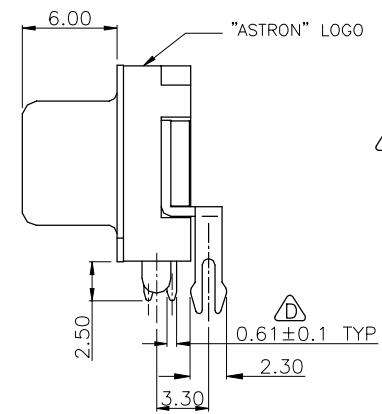
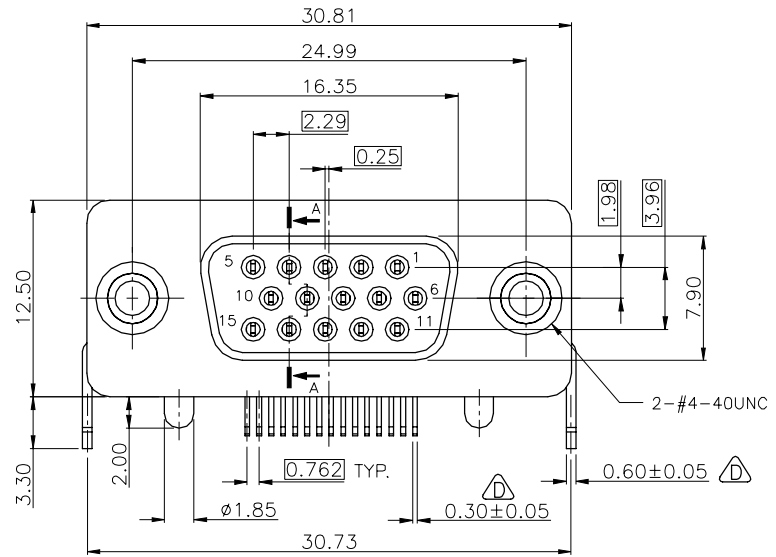


REV.	ECN NO.	DATE
A	RELEASE	Sep 25,2007
B	09'0201	Feb 09,2009
C	N16'06012	Jun 29, 2016
D	N16'12013	Dec 26, 2016



- MATERIALS**
- 1. HOUSING: PA9T, UL 94V-0, BLUE(661C)
 - 2. TERMINAL: COPPER ALLOY,t=0.30mm
GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAIL,
UNDER NICKEL PLATED.
 - 3. BOARD LOCK: COPPER ALLOY,t=0.60mm
TIN PLATED OVERALL.
 - 4. SHELL: STEEL,t=0.40mm,NICKEL PLATED OVERALL.
 - 5. RIVET: Zn ALLOY,NICKEL PLATED OVERALL.

- SPECIFICATIONS**
- 1. CURRENT RATING: 1 A MAX.
 - 2. INSULATION RESISTANCE:
1000 M?? MIN AT 500V DC.
 - 3. DIELECTRIC WITHSTANDING VOLTAGE:
500V(r.m.s) AC R.M.S. FOR 1 MINUTE.
 - 4. CONTACT RESISTANCE: 30 m?? MAX.
 - 5. OPERATING TEMPERATURE: -55°C TO +105°C.

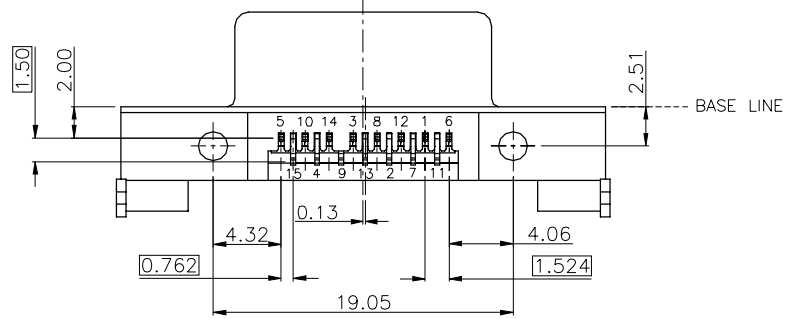


PART NUMBER INFORMATION:

1760015-046-H

SERIES CODE: 1760015
R/A 90°
FEMALE
NUMBER OF POSITIONS

046-H
Halogen Free
FOLLOW NUMBER
CONTACT PLATING:
GOLD FLASH

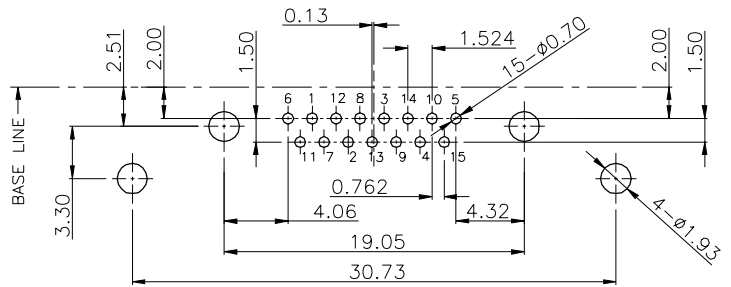

RECOMMEND P.C.B. LAYOUT
TOLERANCE ±0.05
TOP VIEW

TOLERANCE .0=±0.38 .00=±0.25 .000=±0.15 ANG.=±3°		DRAWER CHECK APP'D		 ASTRON TECHNOLOGY CORP. NAME HDD-SUB 15PIN W/AT LOGO SLIM (Halogen Free)
UNITS : mm SCALE NONE SIZE A4		PRODUCT SPEC. DRAW NO. R1760015-046-H		
SHEET 1 OF 1 REV. D				