

REV.	DESCRIPTION	DATE
A	N13'12011	Dec.11.2013
B	N14'03002	Feb.22.2014
C	N14'06010	JUN.16.2014
D	N14'12005	Dec.03.2014
E	N18'02001	Feb.23.2018


MATERIALS:

1. HOUSING: LCP UL94V-0, BLACK.
2. TERMINAL: COPPER ALLOY, T=0.2mm.
PLATING: GOLD PLATED.
3. SHELL: COPPER ALLOY, T=0.4mm.
PLATING: NICKEL PLATED OVERALL.
4. CAP: THERMOPLASTIC (UL94V-0), BLACK.

SPECIFICATION

1. CURRENT RATING: 0.5 A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC R.M.S. FOR ONE MINUTE.
3. CONTACT RESISTANCE: 30mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
5. OPERATING TEMPERATURE: -25°C TO +85°C.
6. SCREW LOCKING FORCE: 4.5±0.5Kg.



PART NUMBER INFORMATION:

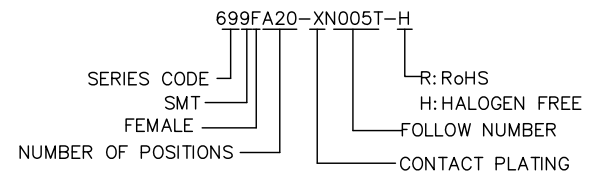

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
6	GOLD 30u"		

TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°	DRAWER <i>BEN</i> CHECK <i>YONY</i> APP'D <i>BN</i>	 Astron ASTRON TECHNOLOGY CORP.	
 PRODUCT SPEC.	NAME DISPLAYPORT SMT TYPE FEMALE		
UNITS: mm		DRAW NO. R699FA20-XN005T-H	
SCALE: NONE	SIZE: A7	SHEET: 1 OF 2	REV.: E

REV.	DESCRIPTION	DATE
A	N13'12011	Dec.11.2013
B	N14'03002	Feb.22.2014
C	N14'06010	JUN.16.2014
D	N14'12005	Dec.03.2014
E	N18'02001	Feb.23.2018

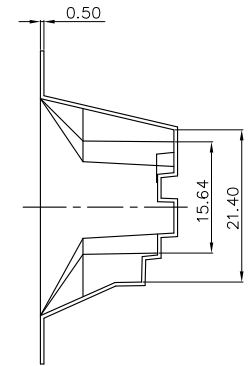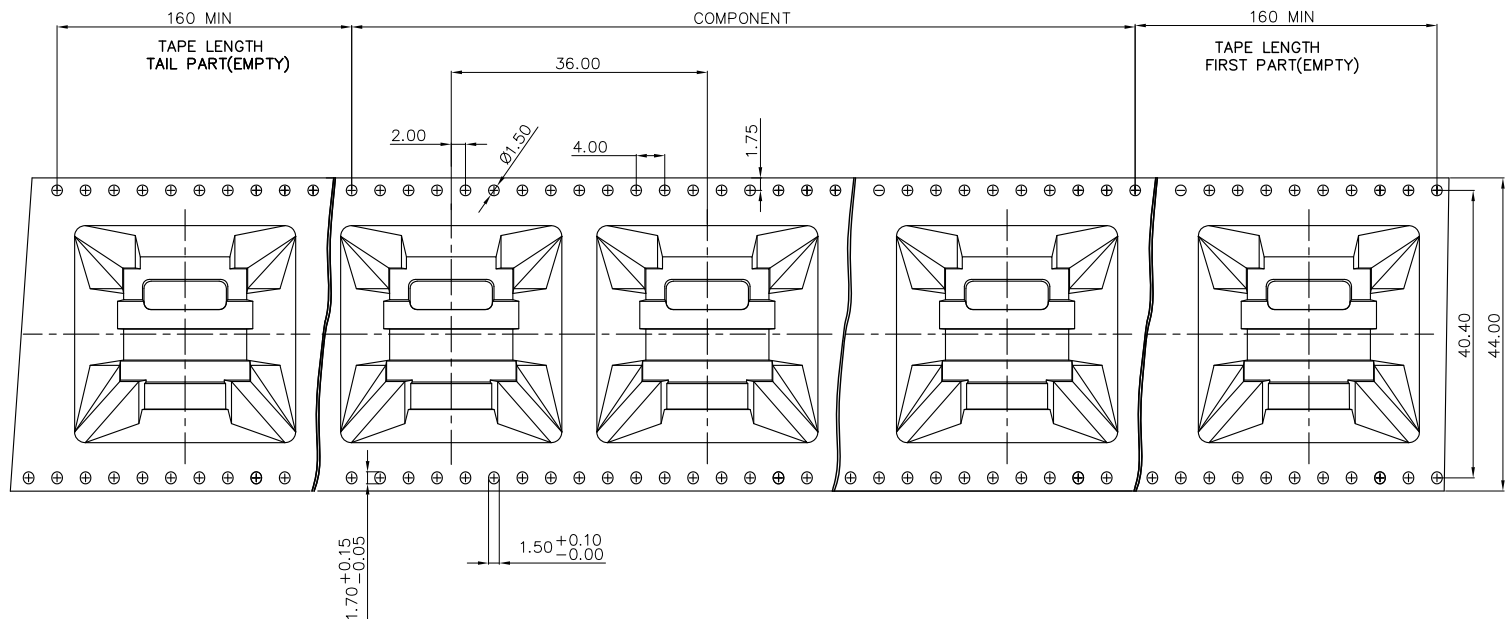

PULL OUT DIRECTION







TAPE & REEL PACKAGE :
MATERIALS

1. CARRIER TAPE: POLYSTYREN (PS)
2. COVER TAPE: POLYSTYREN (PS)
3. REEL: POLYSTYREN (PS)

QUANTITY

1. 70PCS PER REEL
2. 6 REEL PER CARTON(420PCS PER CARTON)
(CARTON : L=350mm, W=350mm, H=420mm)

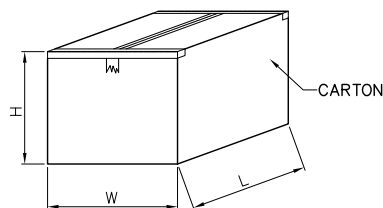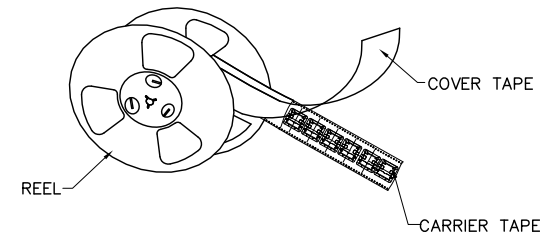

REEL FOR CARRIER TAPE

TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°	DRAWER <i>BEN</i>	 ASTRON TECHNOLOGY CORP.
	CHECK <i>YONY</i>	
UNITS : mm SCALE NONE SIZE A7	APP'D <i>JIN</i>	DISPLAYPORT SMT TYPE FEMALE
	SHEET 2 OF 2	REV. E