
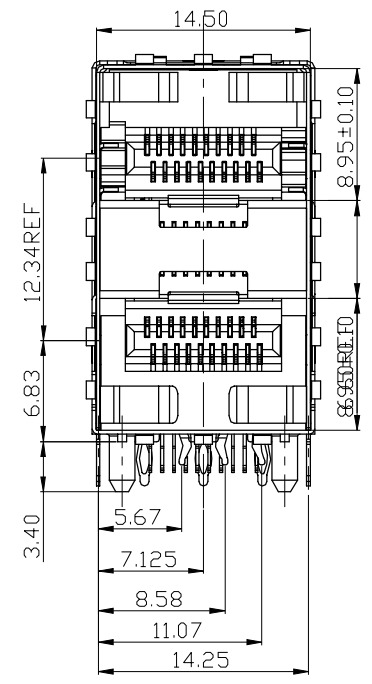
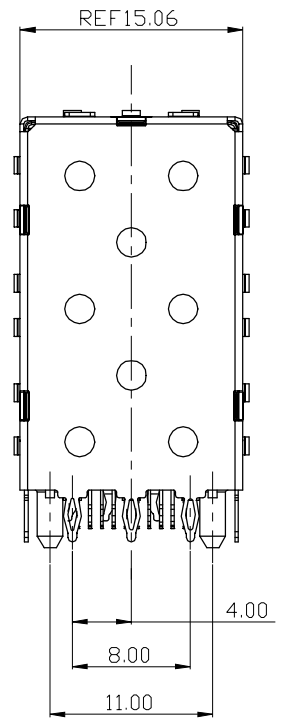
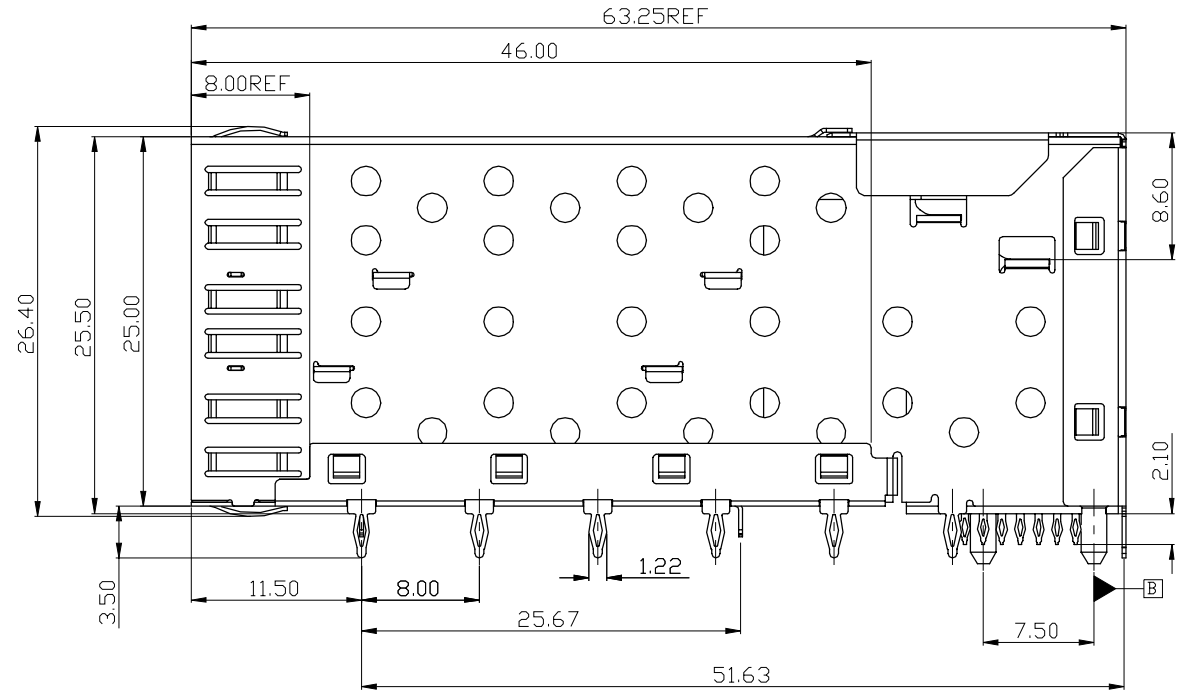


7	8	
REV.	ECN NO.	DATE
A	RELEASE	Jan.10, 2018


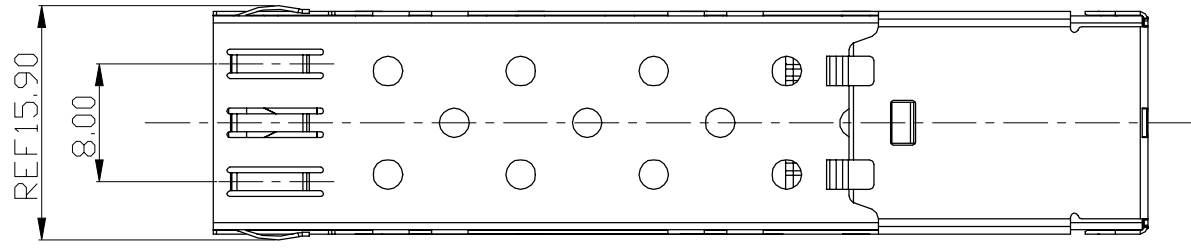


TOLERANCE	
.0=±0.25	
.00=±0.15	
.000=±0.05	
ANG.=±3°	
UNITS : mm	
SCALE	SIZE
NONE	A4

DRAWER	<i>Ben</i>
CHECK	<i>Stony</i>
APP'D	<i>Stony</i>
PRODUCT SPEC.	---
SHEET	REV.
1 OF 3	A

Astron	
ASTRON TECHNOLOGY CORP.	
NAME	
W/O LIGHT PIPES SFP 2 BY 1 CAGE+CONNECTOR	
DRAW NO.	
R7960040-XN001D-R	

REV.	ECN NO.	DATE
A	RELEASE	Jan.10, 2018

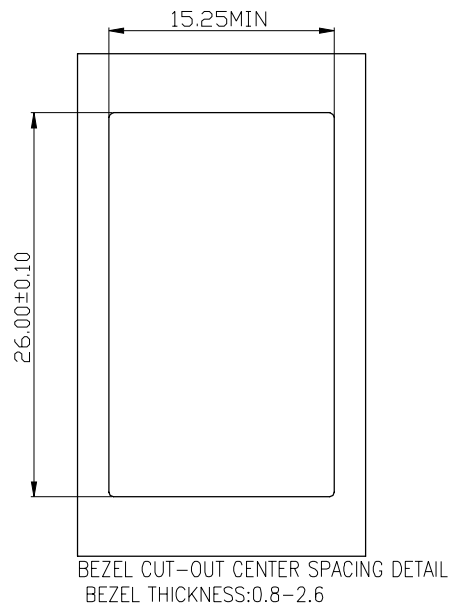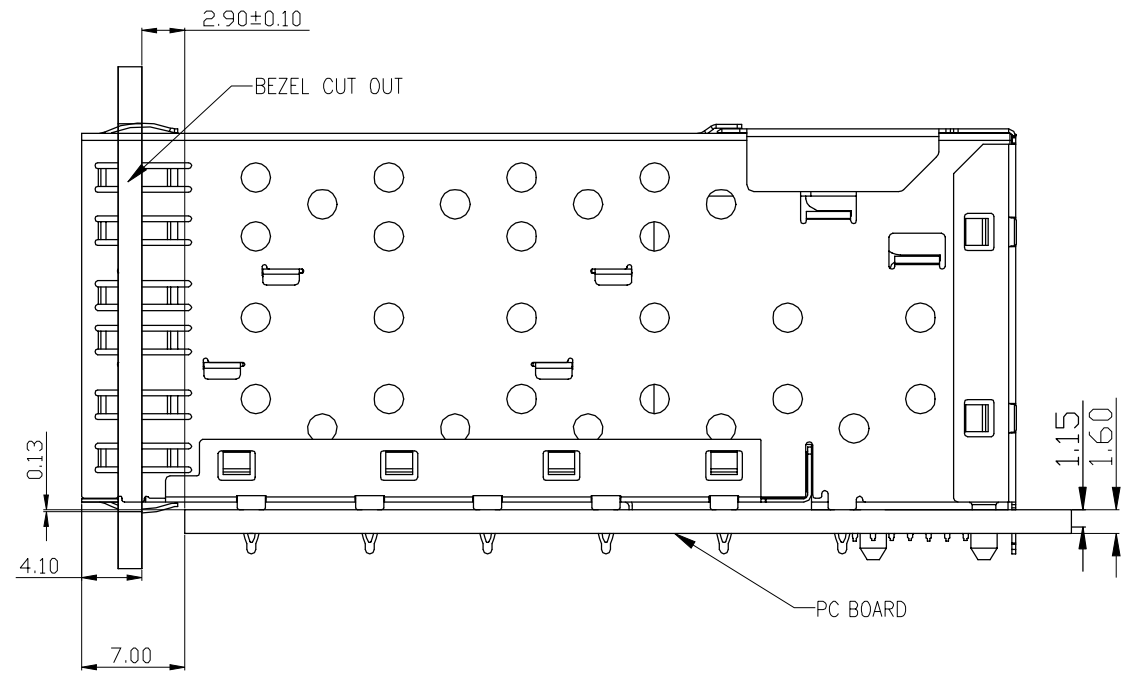


MATERIALS

- HOUSING : LCP (UL94V-0), BLACK.
- SPACER: LCP (UL94V-0), BLACK.
- TERMINAL: PHOSPHOR BRONZE,
GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAIL,
NICKEL PLATED OVER ALL.
- TOP SHELL: BRASS, NICKEL PLATED OVER ALL.
- MIDDLE SHELL: STAINLESS STEEL,
NICKEL PLATED OVER ALL.
- BOTTOM SHELL: BRASS, NICKEL PLATED OVER ALL.
- BACK SHELL: BRASS, NICKEL PLATED OVER ALL.

SPECIFICATION




- CURRENT RATING : 0.5A. MAX.
- VOLTAGE RATING : 120V.
- INSULATION RESISTANCE : 100MΩ MIN.
AT 300V DC.
- CONTACT RESISTANCE : 30mΩ MAX.
- OPERATING TEMPERATURE : -40°C TO +85°C.
- DURABILITY : 100 CYCLES.

PART NUMBER INFORMATION

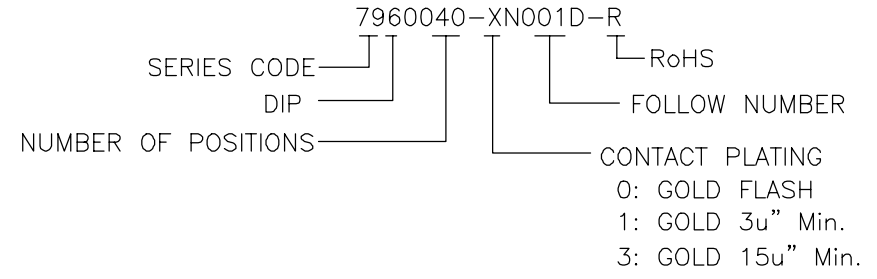


TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		DRAWER <i>Ehen</i>		 ASTRON TECHNOLOGY CORP.
UNITS : mm		CHECK <i>Stony</i>		
SCALE NONE		APP'D <i>Stony</i>		DRAW NO. R7960040-XN001D-R
SIZE A4	SHEET 2 OF 3	REV. A		

REV.	ECN NO.	DATE
A	RELEASE	Jan.10, 2018

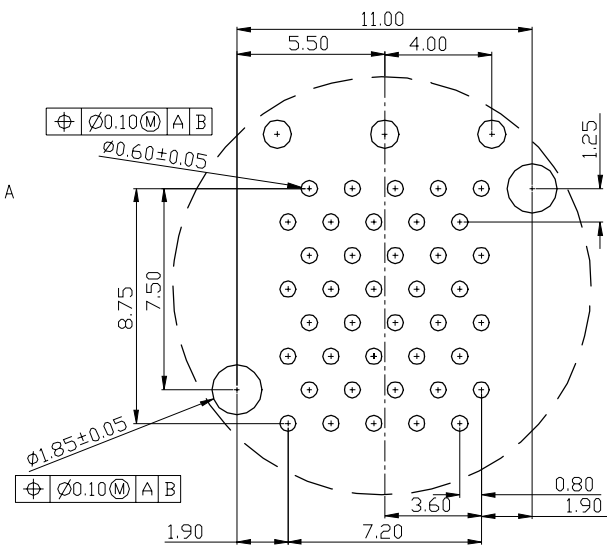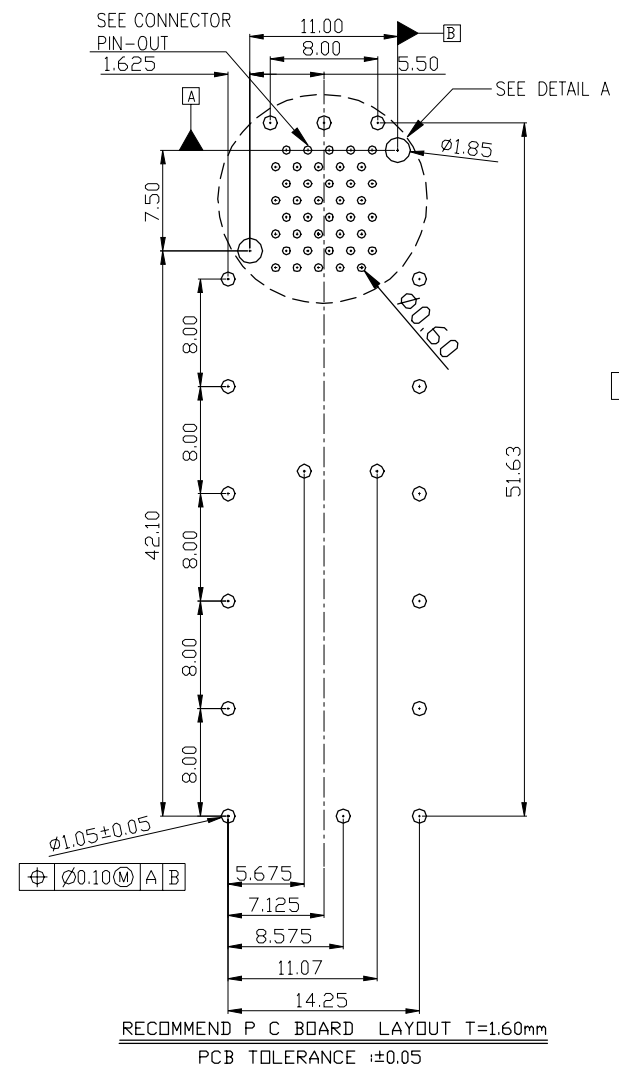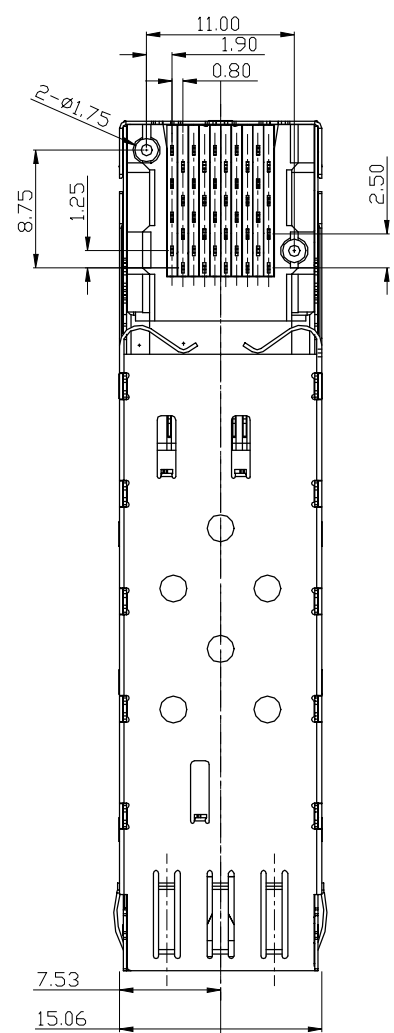

DEATIL A
SCALE 2:1

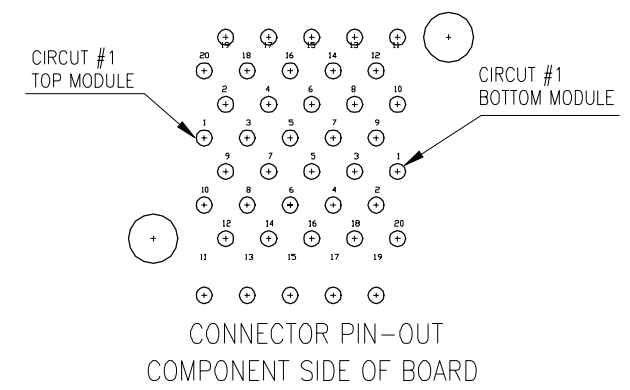

TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		DRAWER <i>Chen</i>		 ASTRON TECHNOLOGY CORP.
 UNITS : mm		CHECK <i>Stony</i>		
SCALE NONE		APP'D <i>Stony</i>		DRAW NO.
SIZE A4		PRODUCT SPEC. ---		R7960040-XN001D-R
SHEET 3 OF 3		REV. A		