
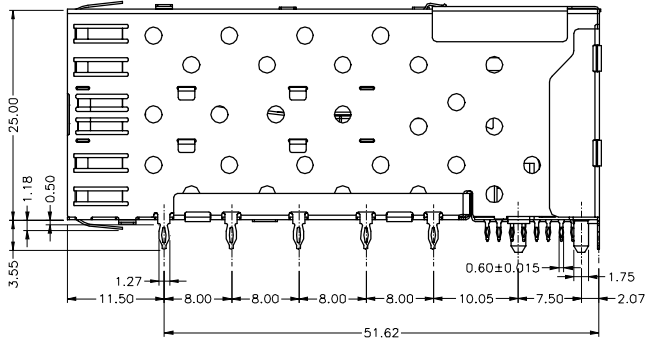
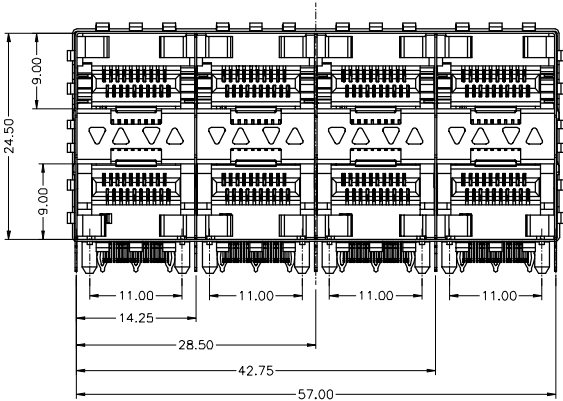


F
E
D
C
B
A

1 2 3 4 5 6 7 8


REV.	ECN NO.	DATE
A	RELEASE	Mar.21, 2013

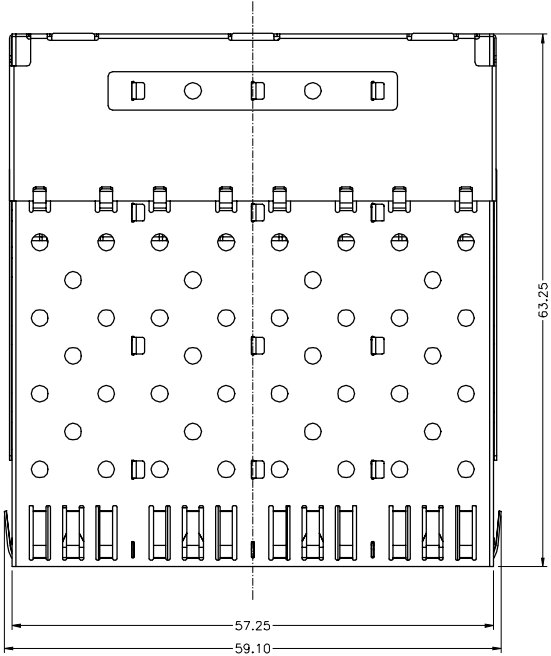




<u>TOLERANCE</u> .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		DRAWER <i>Chen</i>	 ASTRON TECHNOLOGY CORP.	
		CHECK <i>Henry</i>		
		APP'D <i>Henry</i>	NAME	
		PRODUCT SPEC. —	WITH INTER&OUTER LIGHT PIPES SFP PLUS 2 BY 4 CAGE+CONNECTOR	
UNITS : mm			DRAW NO.	
SCALE NONE	SIZE A4	SHEET 1 OF 3	REV. A	R7960160—XN001D—R

1 2 3 4 5 6 7 8

REV.	ECN NO.	DATE
A	RELEASE	Mar.21, 2013

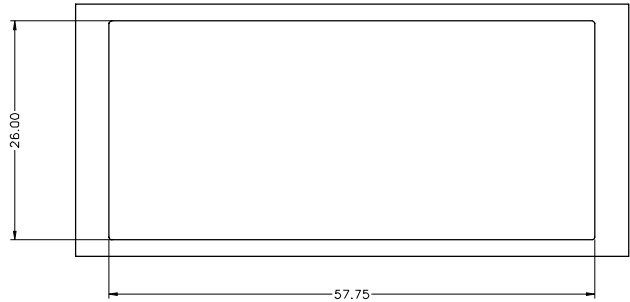

BEZEL CUT-OUT CENTER SPACING DETAIL
BEZEL THICKNESS:0.8-2.6

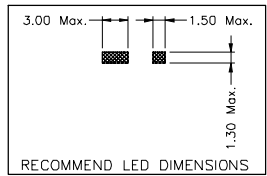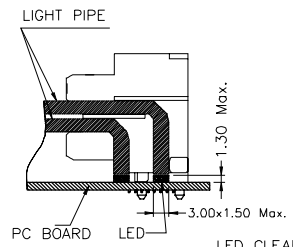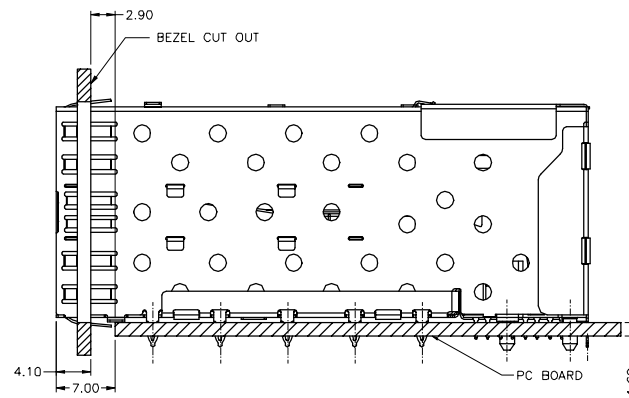

LED CLEARANCE REQUIREMENTS


MATERIALS

1. HOUSING : LCP (UL94V-0), BLACK.
2. SPACER: LCP (UL94V-0), BLACK.
3. TERMINAL: PHOSPHOR BRONZE,
GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAIL,
NICKEL PLATED OVER ALL.
4. TOP SHELL: BRASS, NICKEL PLATED OVER ALL.
5. MIDDLE SHELL: STAINLESS STEEL,
NICKEL PLATED OVER ALL.
6. BOTTOM SHELL: BRASS, NICKEL PLATED OVER ALL.
7. BACK SHELL: BRASS, NICKEL PLATED OVER ALL.

SPECIFICATION


1. CURRENT RATING : 0.5A. MAX.
2. VOLTAGE RATING : 120V.
3. INSULATION RESISTANCE : 100MΩ MIN.
AT 300V DC.
4. CONTACT RESISTANCE : 30mΩ MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.
6. DURABILITY : 100 CYCLES.

PART NUMBER INFORMATION

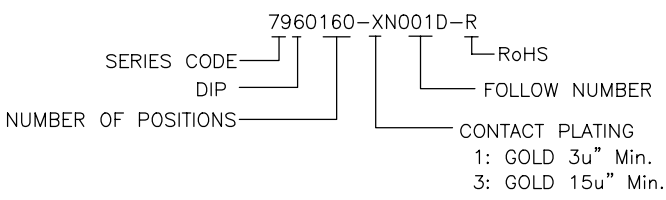

<u>TOLERANCE</u> .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		DRAWER <i>Chen</i>		 ASTRON TECHNOLOGY CORP.
		CHECK <i>Hony</i>		
		APP'D <i>Hony</i>		
		PRODUCT SPEC. _____		
UNITS : mm		DRAW NO.		R7960160-XN001D-R
SCALE NONE	SIZE A4	SHEET 2 OF 3	REV. A	


REV.	ECN NO.	DATE
A	RELEASE	Mar.21, 2013

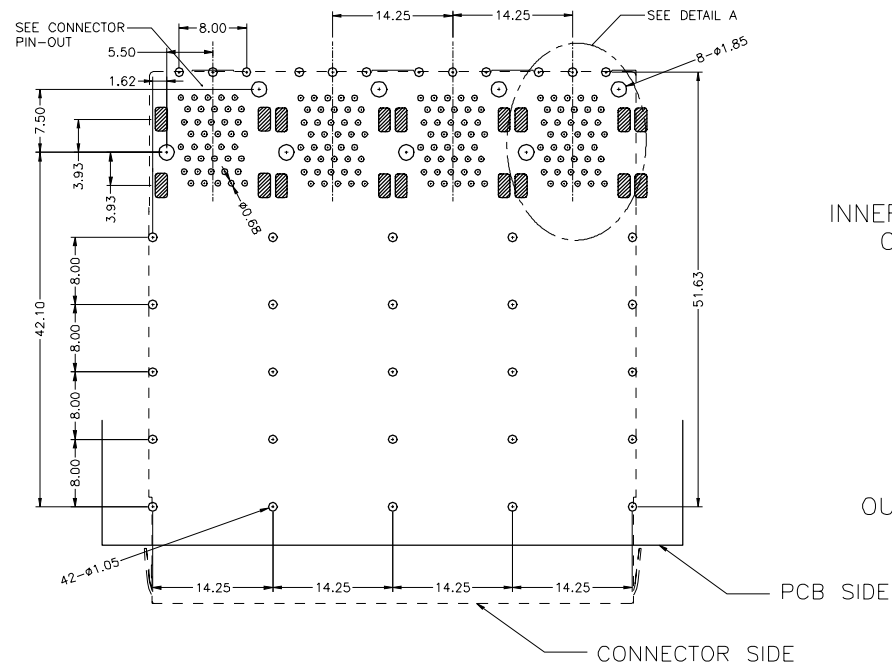


INNER LIGHTPIPE
OUTLINE

OUTER LIGHTPIPE
OUTLINE

DEATIL A
SCALE 2:1

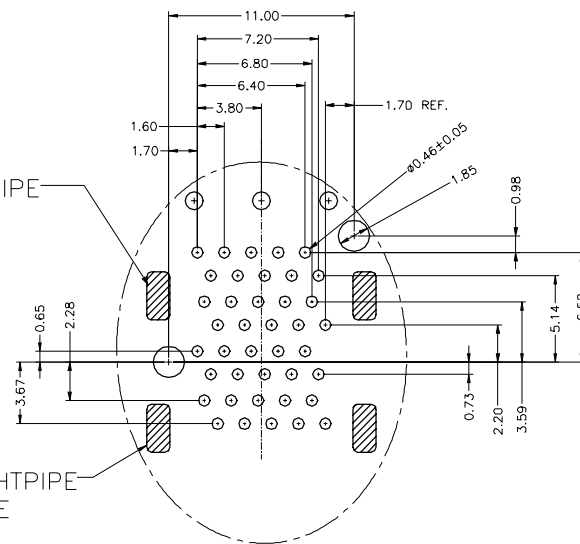

P.C.B. LAYOUT
TOP VIEW ± 0.05

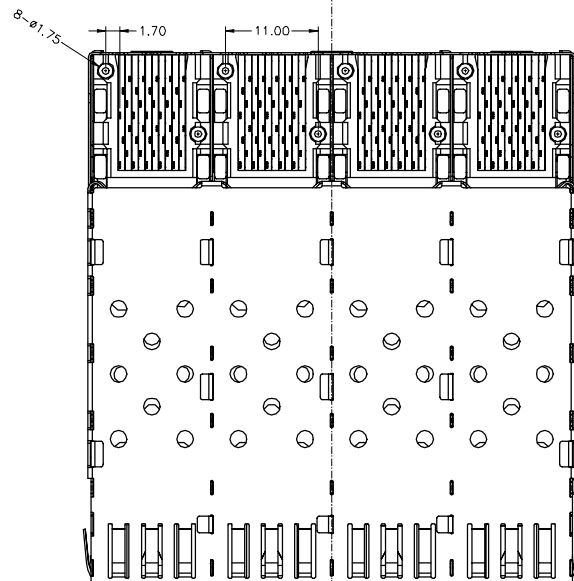

CIRCUIT #1
TOP MODULE

CIRCUIT #1
BOTTOM MODULE

CONNECTOR PIN-OUT
COMPONENT SIDE OF BOARD

<u>TOLERANCE</u> .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		DRAWER <i>Chen</i>		ASTRON TECHNOLOGY CORP.
		CHECK <i>Henry</i>		
		APP'D <i>Henry</i>		NAME
		PRODUCT SPEC. _____		WITH INTER&OUTER LIGHT PIPES SFP PLUS 2 BY 4 CAGE+CONNECTOR
				DRAW NO.
UNITS : mm				
SCALE NONE	SIZE A4	SHEET 3 OF 3	REV. A	R7960160—XN001D—R