


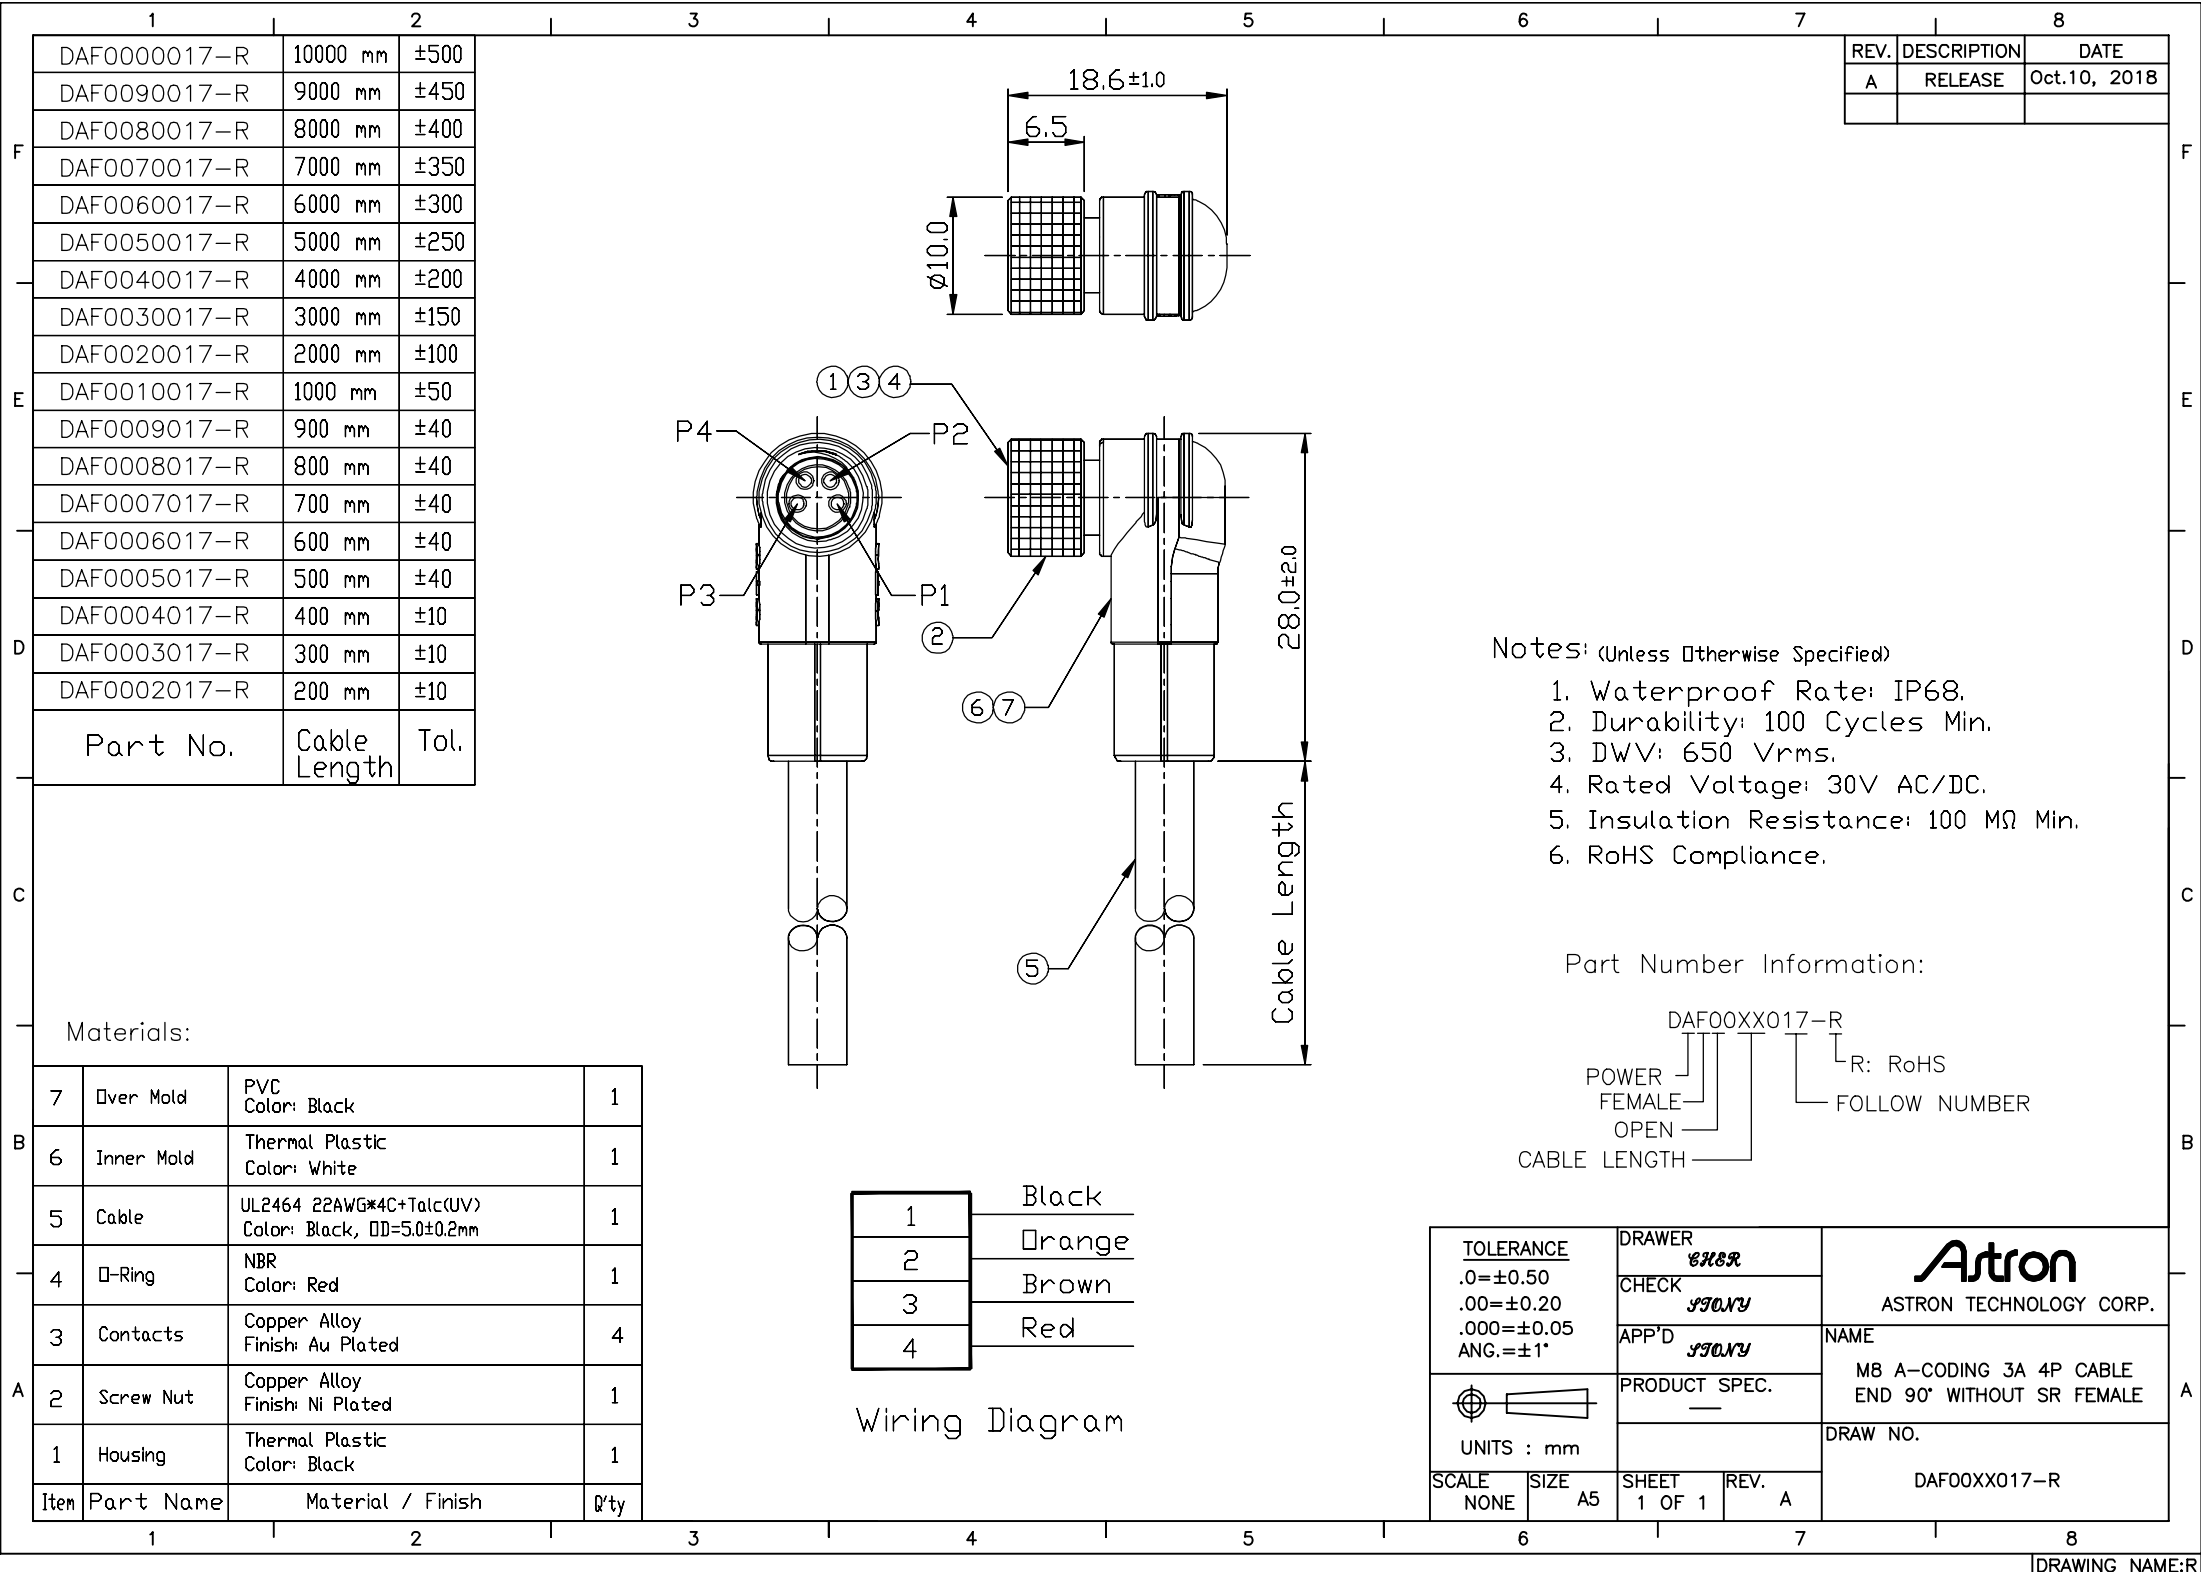

DAF0000017-R	10000 mm	±500
DAF0090017-R	9000 mm	±450
DAF0080017-R	8000 mm	±400
DAF0070017-R	7000 mm	±350
DAF0060017-R	6000 mm	±300
DAF0050017-R	5000 mm	±250
DAF0040017-R	4000 mm	±200
DAF0030017-R	3000 mm	±150
DAF0020017-R	2000 mm	±100
DAF0010017-R	1000 mm	±50
DAF0009017-R	900 mm	±40
DAF0008017-R	800 mm	±40
DAF0007017-R	700 mm	±40
DAF0006017-R	600 mm	±40
DAF0005017-R	500 mm	±40
DAF0004017-R	400 mm	±10
DAF0003017-R	300 mm	±10
DAF0002017-R	200 mm	±10
Part No.	Cable Length	Tol.

Materials:

7	Over Mold	PVC Color: Black	1
6	Inner Mold	Thermal Plastic Color: White	1
5	Cable	UL2464 22AWG*4C+Talc(UV) Color: Black, OD=5.0±0.2mm	1
4	O-Ring	NBR Color: Red	1
3	Contacts	Copper Alloy Finish: Au Plated	4
2	Screw Nut	Copper Alloy Finish: Ni Plated	1
1	Housing	Thermal Plastic Color: Black	1
Item	Part Name	Material / Finish	Qty

1	Black
2	Orange
3	Brown
4	Red

Wiring Diagram

REV.	DESCRIPTION	DATE
A	RELEASE	Oct.10, 2018

- Notes: (Unless Otherwise Specified)
1. Waterproof Rate: IP68.
 2. Durability: 100 Cycles Min.
 3. DWV: 650 Vrms.
 4. Rated Voltage: 30V AC/DC.
 5. Insulation Resistance: 100 MΩ Min.
 6. RoHS Compliance.

Part Number Information:

DAF00XX017-R

POWER FEMALE OPEN CABLE LENGTH

R: RoHS FOLLOW NUMBER

TOLERANCE .0=±0.50 .00=±0.20 .000=±0.05 ANG.=±1°	DRAWER CHKD CHECK JYUWY APP'D JYUWY	Astron ASTRON TECHNOLOGY CORP.
PRODUCT SPEC. —	NAME M8 A-CODING 3A 4P CABLE END 90° WITHOUT SR FEMALE	DRAW NO. DAF00XX017-R
SCALE NONE	SIZE A5	SHEET 1 OF 1
REV. A		