


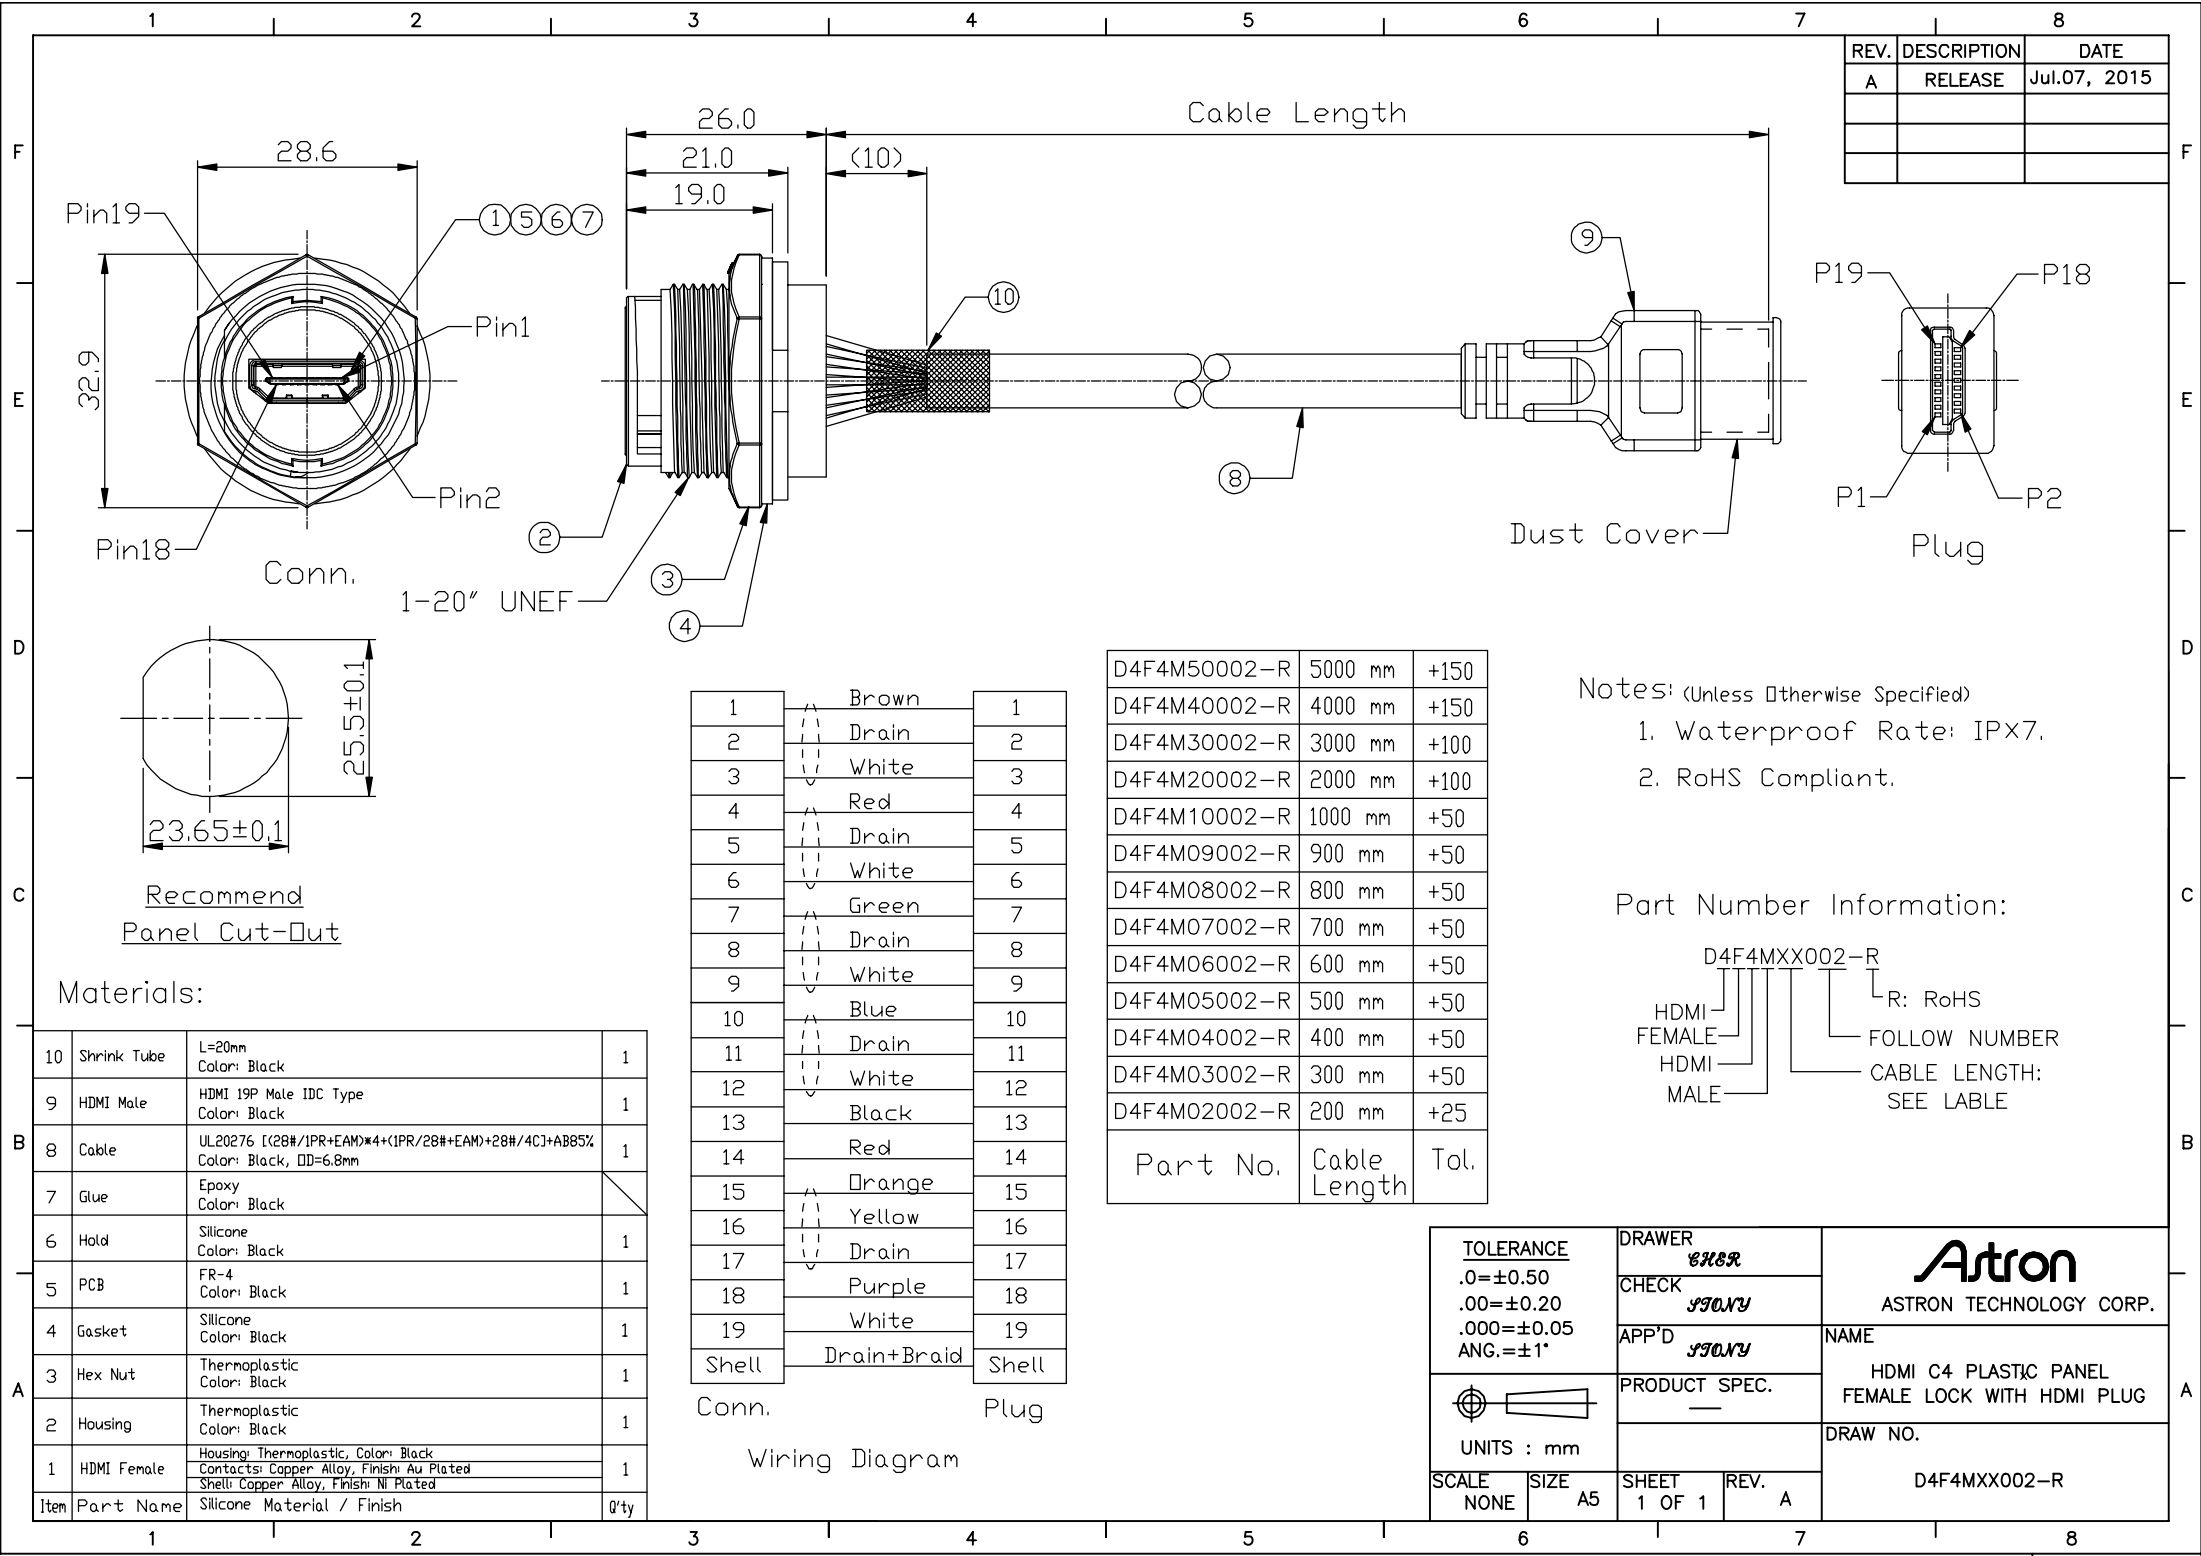

REV.	DESCRIPTION	DATE
A	RELEASE	Jul.07, 2015

D4F4M50002-R	5000 mm	+150
D4F4M40002-R	4000 mm	+150
D4F4M30002-R	3000 mm	+100
D4F4M20002-R	2000 mm	+100
D4F4M10002-R	1000 mm	+50
D4F4M09002-R	900 mm	+50
D4F4M08002-R	800 mm	+50
D4F4M07002-R	700 mm	+50
D4F4M06002-R	600 mm	+50
D4F4M05002-R	500 mm	+50
D4F4M04002-R	400 mm	+50
D4F4M03002-R	300 mm	+50
D4F4M02002-R	200 mm	+25
Part No.	Cable Length	Tol.

Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IPx7.

2. RoHS Compliant.

Part Number Information:

D4F4MXX002-R

HDMI FEMALE

HDMI MALE

R: RoHS

FOLLOW NUMBER


CABLE LENGTH: SEE TABLE

10	Shrink Tube	L=20mm Color: Black	1
9	HDMI Male	HDMI 19P Male IDC Type Color: Black	1
8	Cable	UL20276 [(28#/1PR+EAM)*4+(1PR/28#+EAM)+28#/4C]+AB85% Color: Black, OD=6.8mm	1
7	Glue	Epoxy Color: Black	1
6	Hold	Silicone Color: Black	1
5	PCB	FR-4 Color: Black	1
4	Gasket	Silicone Color: Black	1
3	Hex Nut	Thermoplastic Color: Black	1
2	Housing	Thermoplastic Color: Black	1
1	HDMI Female	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
Item	Part Name	Silicone Material / Finish	Qty

1	Brown	1
2	Drain	2
3	White	3
4	Red	4
5	Drain	5
6	White	6
7	Green	7
8	Drain	8
9	White	9
10	Blue	10
11	Drain	11
12	White	12
13	Black	13
14	Red	14
15	Orange	15
16	Yellow	16
17	Drain	17
18	Purple	18
19	White	19
Shell	Drain+Braid	Shell

Conn. Plug

Wiring Diagram

<u>TOLERANCE</u> .0=±0.50 .00=±0.20 .000=±0.05 ANG.=±1°		DRAWER <i>CHKD</i>		 ASTRON TECHNOLOGY CORP.
		CHECK <i>JYUNY</i>		
		APP'D <i>JYUNY</i>		NAME HDMI C4 PLASTIC PANEL FEMALE LOCK WITH HDMI PLUG
 UNITS : mm		PRODUCT SPEC. —		
				DRAW NO. D4F4MXX002-R
SCALE NONE	SIZE A5	SHEET 1 OF 1	REV. A	